

Learn more by visiting

www.dvmsystem.com
www.samsung.com

Samsung Electronics Co., LTD.

Head Office (Suwon Korea)
129, Samsung-ro, Yeongtong-Gu,
Suwon City, Gyeonggi-Do,
443-742, Korea

SAMSUNG



Space for Partnership

Samsung ECO HEATING SYSTEM

With Samsung's Eco Heating System that uses renewable energy,
you will feel the warmth even with your heart.



SAMSUNG

Samsung is moving with and ahead of our customers


“Put simply, our differentiation is centered on producing innovative technology that brings genuine change to people’s lives. We do this by bringing a relentless focus on consumer experience and product innovation in everything we do.”

- Sue Shim CMO (Chief Marketing Officer), SAMSUNG



Global Business Network

● 11 Global Operation Centers ● 10 Global Headquarters ● 4 HA R&D Centers ● 7 Design Centers

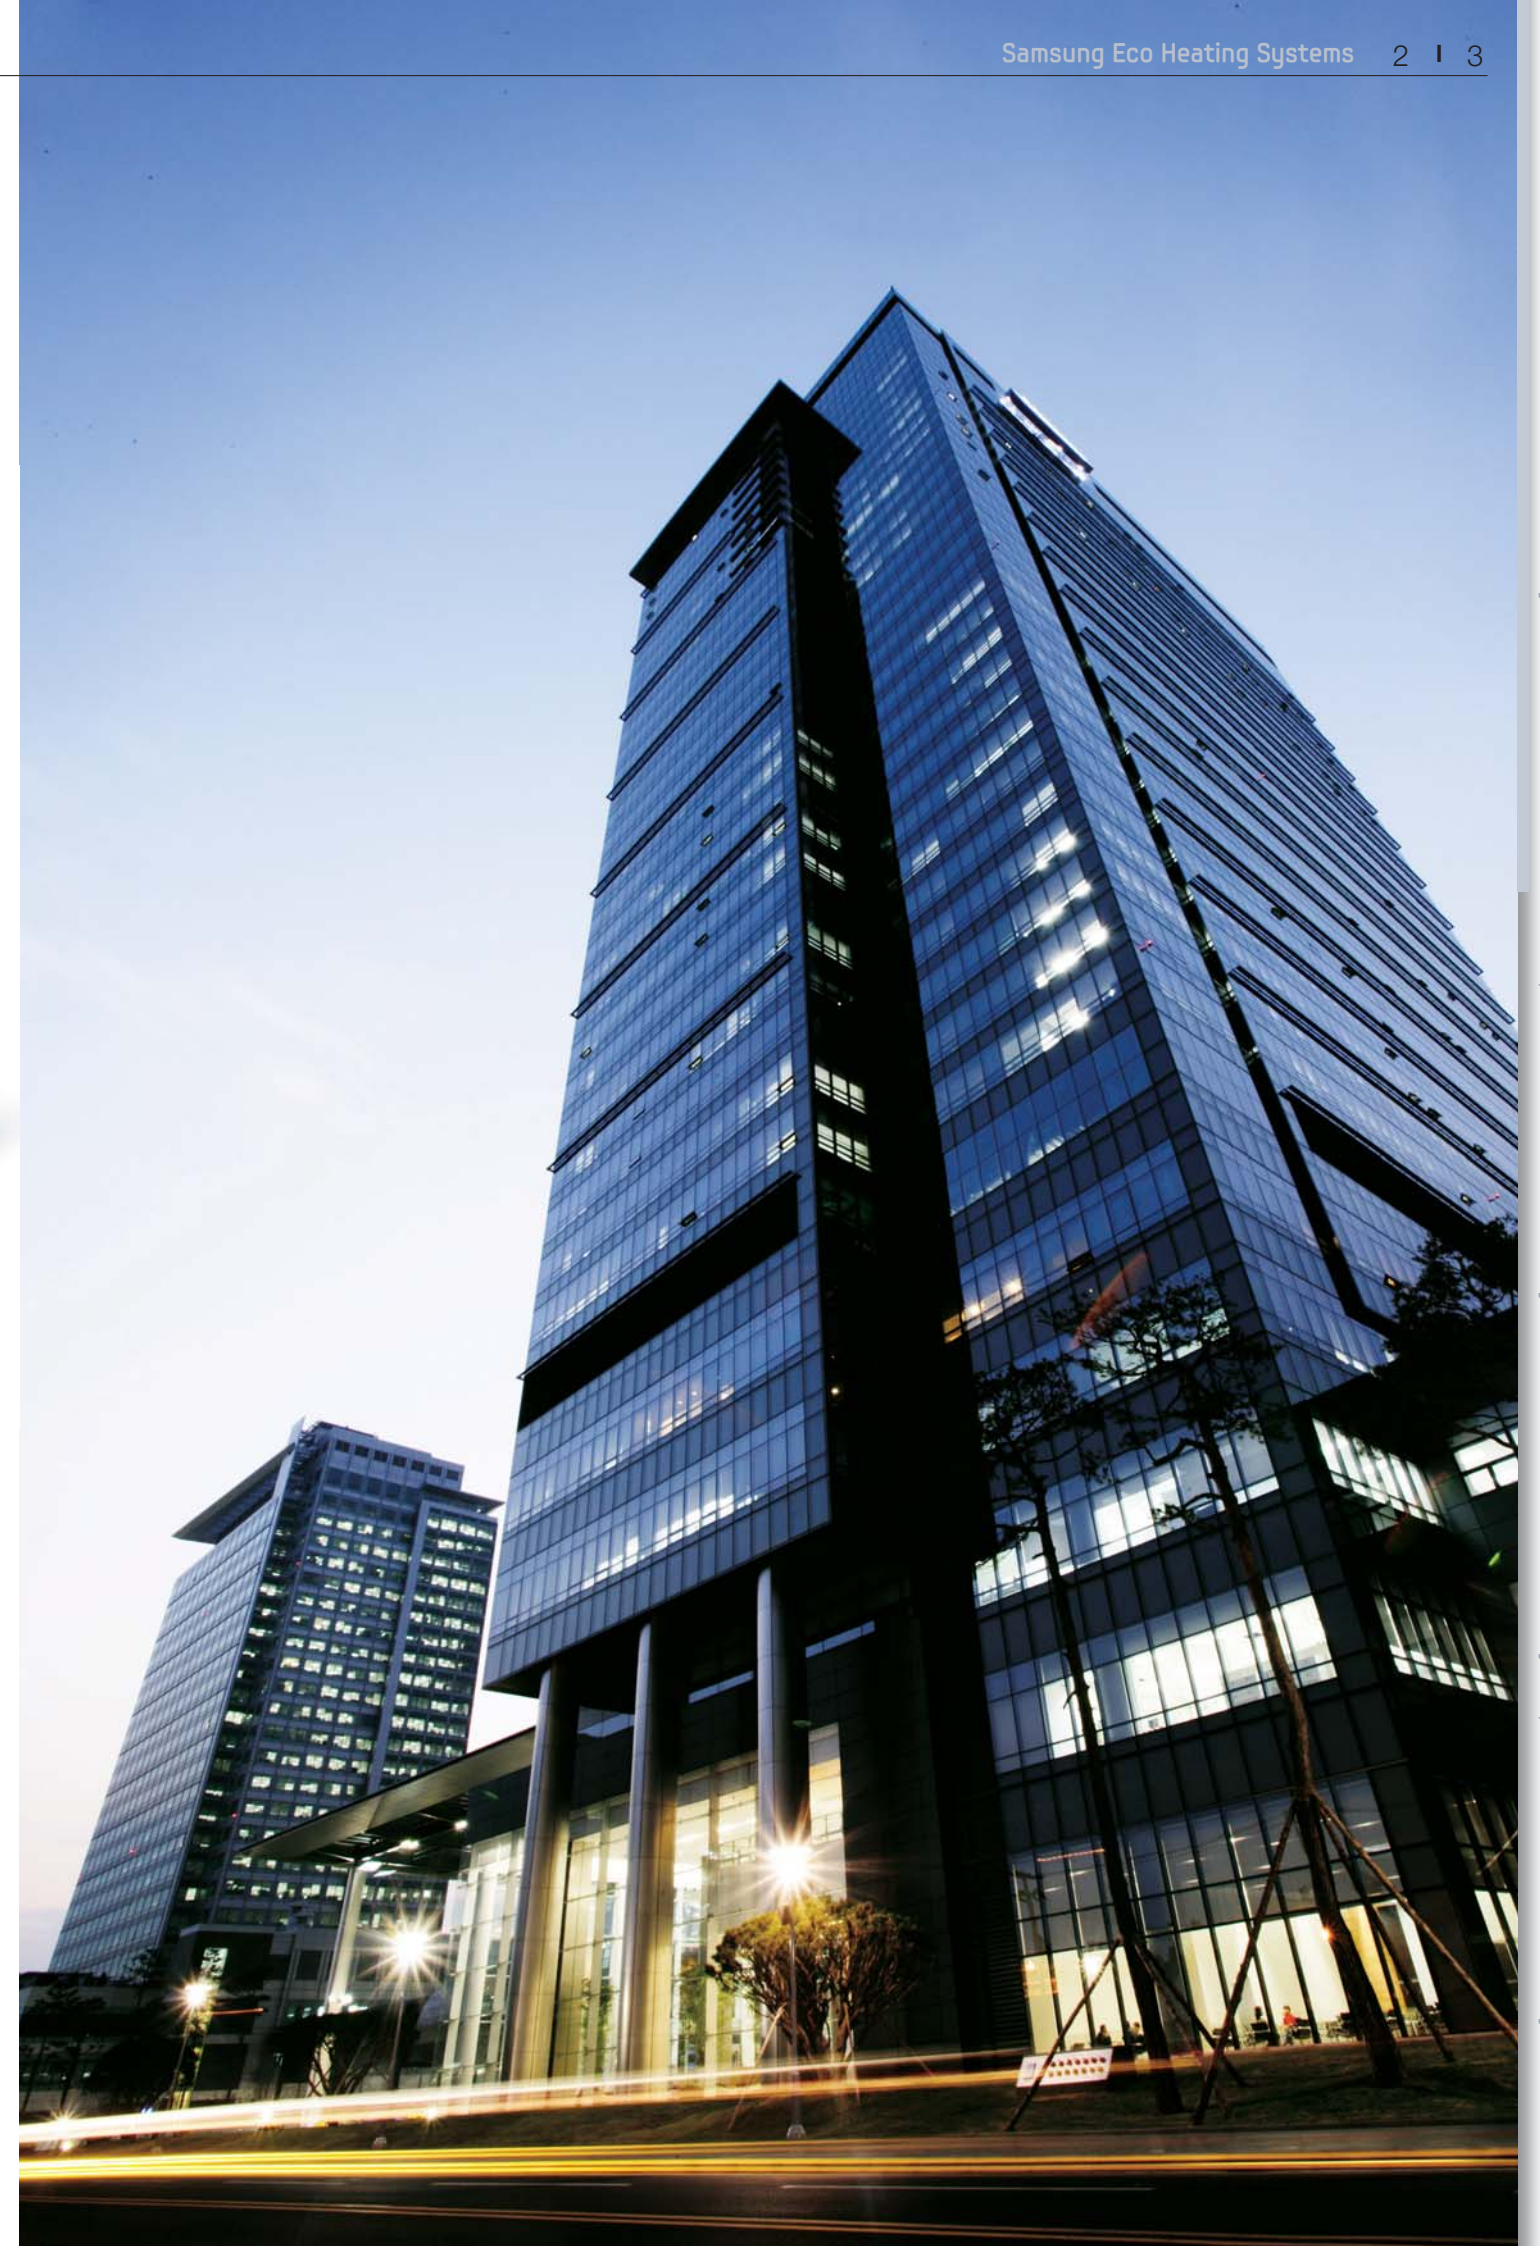

'Eco-friendly' Samsung

Preserves the nature you live in.

Thinking of you and the environment, Samsung plans for the future. Realizing your hopes for a greener, healthier life for you and the generations that follow, Samsung's environment-friendly technologies work to make the world a more beautiful place.


2012 SAMSUNG
ECO HEATING SYSTEMS

Contents

INTRODUCTION BRAND VALUE ECO-FRIENDLY SAMSUNG ECO HEATING SYSTEMS	2p
WHY EHS? TIME TO CHANGE THE OLD WAY OF HEATING ECOLOGICAL & ECONOMICAL HEATING SYSTEM	6p
SAMSUNG EHS LINE UP EHS MONO EHS SPLIT EHS TDM	10p
RESIDENTIAL TYPE FEATURE EHS MONO EHS SPLIT EHS TDM	12p
RESIDENTIAL TYPE SPECIFICATION EHS MONO EHS SPLIT EHS TDM ACCESSORIES EHS SIMULATOR	24p
COMMERCIAL TYPE	34p

Time to change the old way of heating

“Are you still consuming polluttional gas and oil to stay warm in winter?”

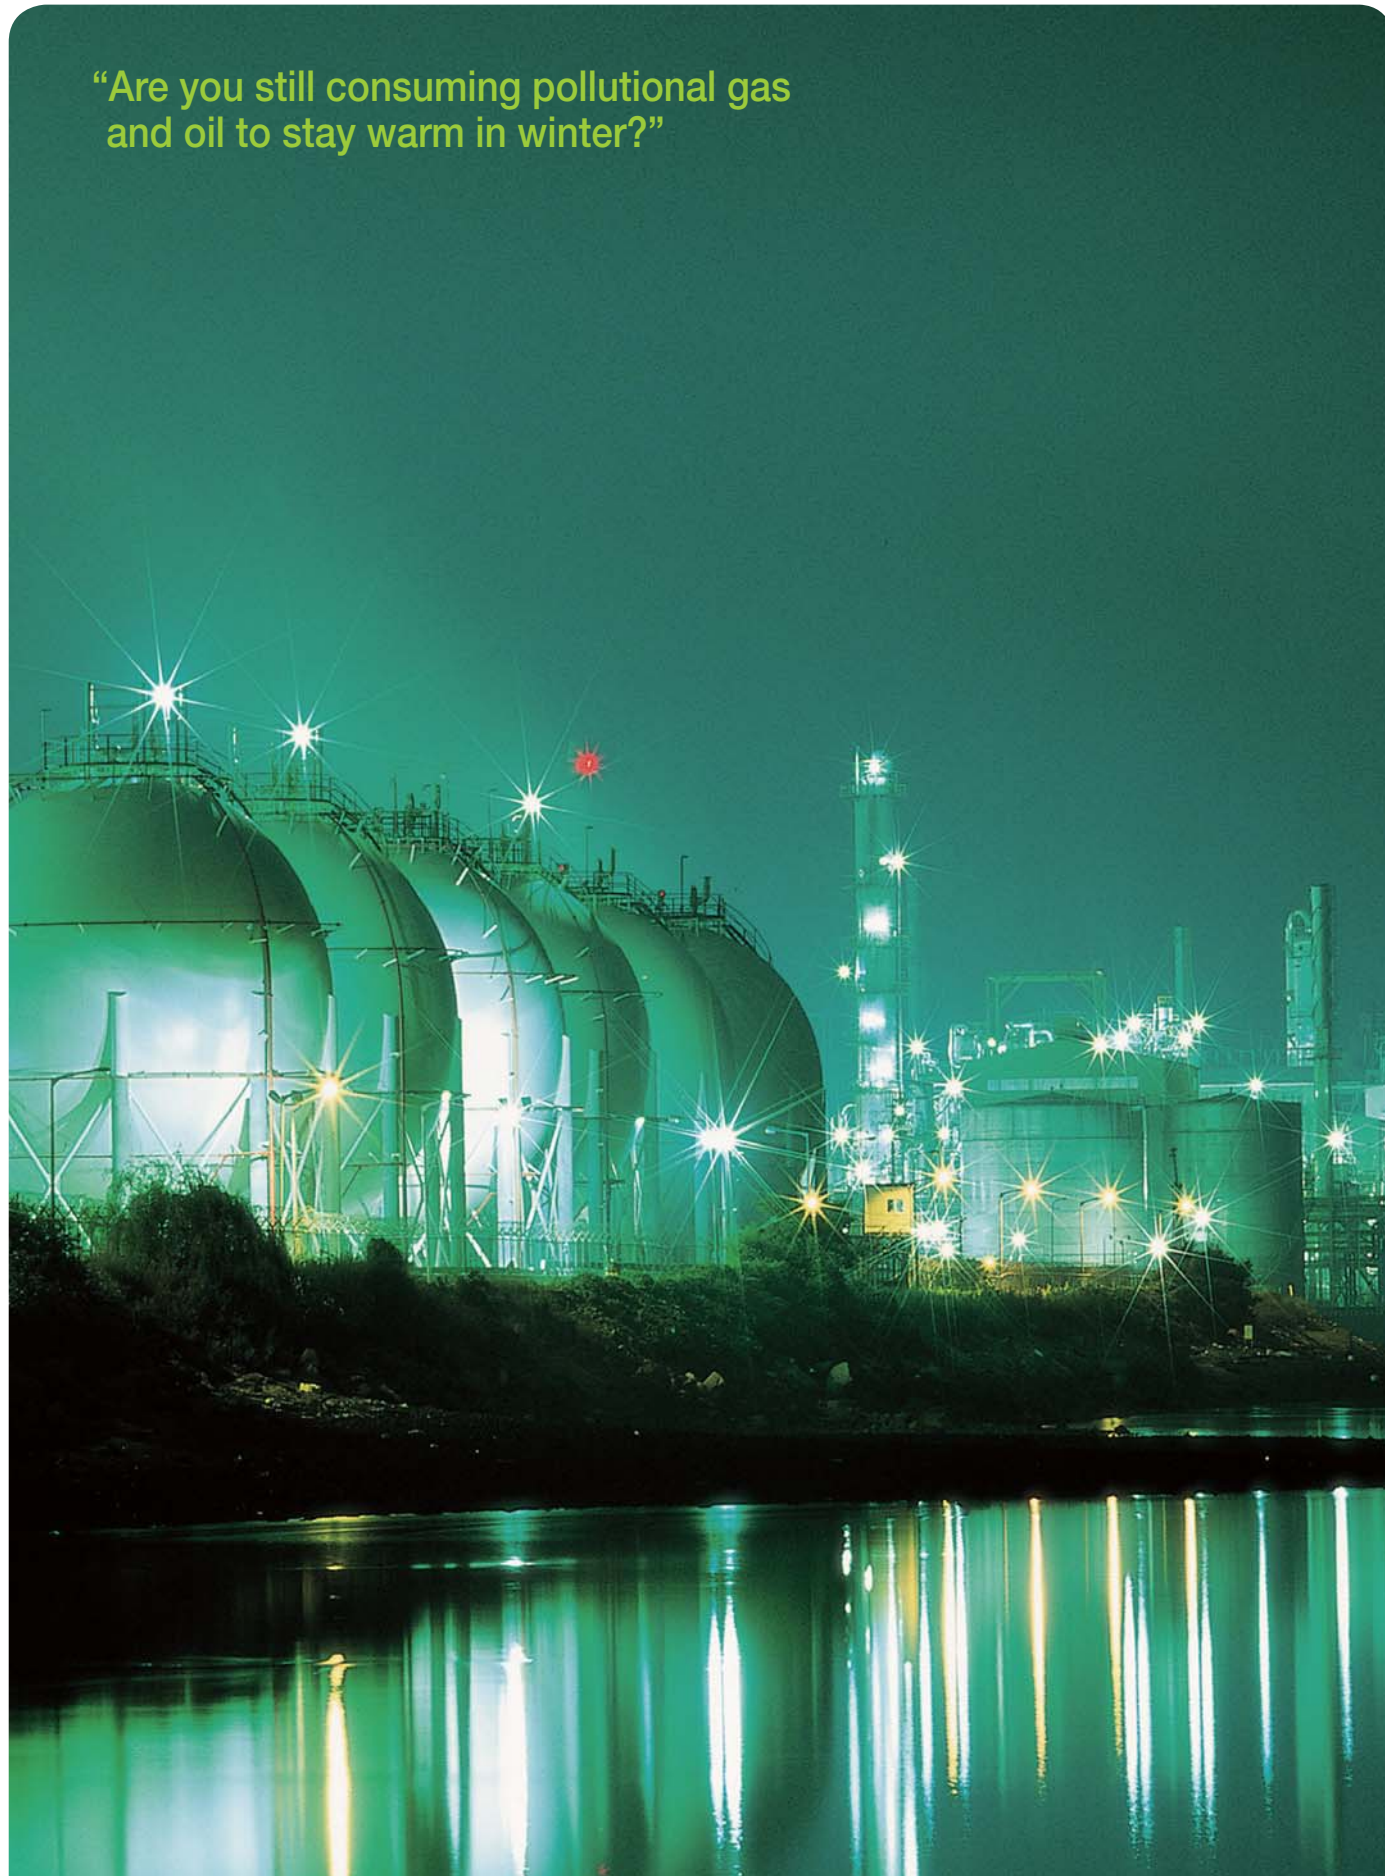

EU Energy efficiency plan 2011


Save primary energy, spend less money

'Energy efficiency plan 2011' is aimed to reduce primary energy usage up to 20% by 2020. EU nations are trying to save money that is being wasted by unnecessary energy loss.



Eco-labels & Declaration

Samsung Electronics makes on-going efforts to develop environment-friendly products that minimize the negative impacts on the environment in every aspect of its products, from raw material procurement to production, transportation, usage and final disposal. Concerns for the environment are at the core of each product development. Samsung's environment-friendly technologies and recycling programs have been highly recognized via various global approvals and awards worldwide.

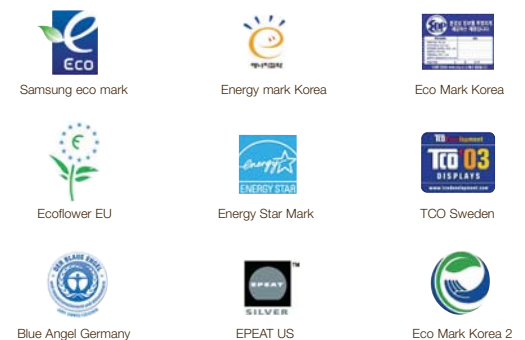

Reason why we made Samsung EHS



Global Warming

Human activity has resulted in an increase in Greenhouse gas emissions (CO₂).



Oil is running out!

As the oil price is getting higher, we need renewable energy resources.



Un-Sustainable Resources

Rising oil prices have lead to the associated operating costs of heating a home to increase.



Samsung EHS

Samsung's system can be integrated into your home and provide heating, hot water supply and air conditioning using only one system.



Save money

Samsung's EHS, can reduce your running costs by up to a 30% compared to a standard gas boiler system.



Keep our planet green

Using renewable energy efficiently instead of conventional boilers, will reduce CO₂ emissions and keep our planet green.

Ecological & Economical Heating System



“Samsung EHS is more eco-friendly and efficient than any other solutions out there”



Heat-pump system

Using renewable energy from surrounding environment


A heat pump uses the heat from ambient air, which is free and renewable energy source, for heating and hot water. Using a heat pump system for your house is an energy efficient and environmentally friendly solution.

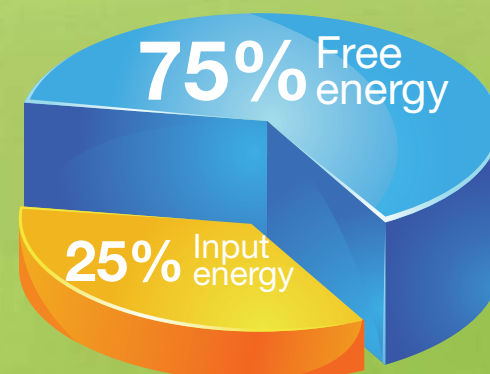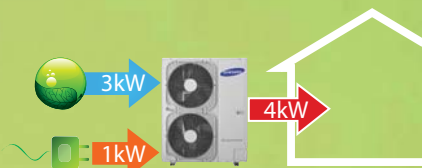

High seasonal COP

High seasonal COP means less CO₂ emission

Samsung EHS has proven its optimizes heating performances at the actual operating temperature, -2°C to 2°C, providing an outstanding SCOP in compliance with eco-design directives.

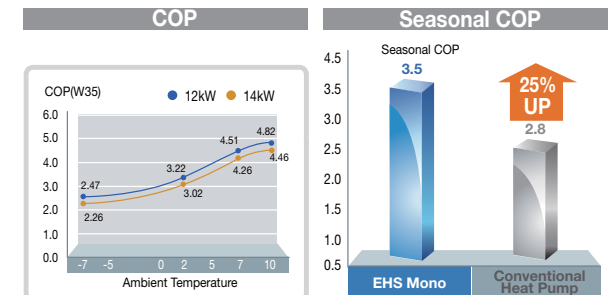


* based on SAMSUNG own test result according to VDI4650 standard

Low running cost

High efficiency technology, low running cost

High efficiency heat pump technology will reduce running cost. Samsung EHS Mono can reduce approximately up to 36~60% of running costs compare to conventional boiler systems.

Fuel	Oil	Gas	Heat Pump (Electricity)
Fuel Price	0.974 (euro/liter)	0.0622 (euro/kWh)	0.1478 (euro/kWh)
Efficiency	0.86	0.93	4.2 (A7/W35)

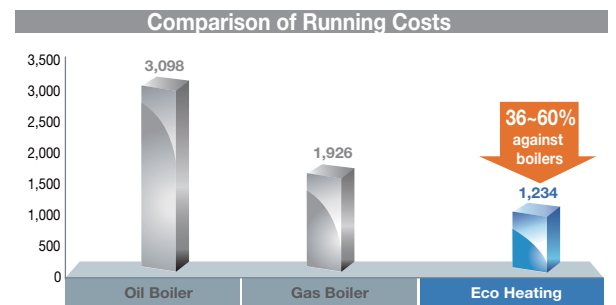

* Fuel Price based on <http://www.energy.eu>

* Standing Charge : 220 euro

* Heating Time

- 5 months x (30 days/month) x (12 hours/day) = 1800 hours

* Heat Pump

- Model : EHS Mono 16kW (1phase)


- Power Consumption : 3.81kW (A7/W35)

Low CO₂ emission

Samsung's new way of heating is the greener way

Samsung EHS Mono has substantially reduced CO₂ emissions compare to conventional boiler systems due to high-efficiency heat pump technology.

Fuel	CO ₂ Emission Factor (kg/kWh)	Fuel	Efficiency
Oil	0.26	Oil	0.86
Gas	0.19	Gas	0.93
Electricity	0.43	Conventional HP	3.0
		EHS Mono	3.5(SCOP)

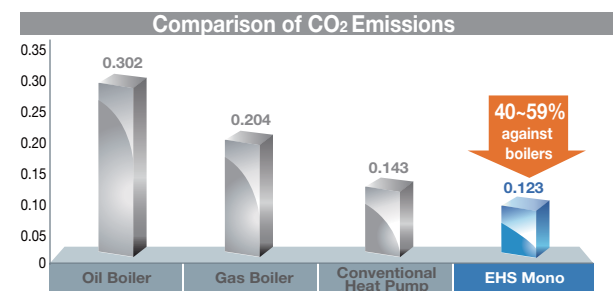

* Government figure for UK long term average grid output




* CO₂ Emission = CO₂ Emission Factor / Efficiency

Samsung EHS Line Up

“ Various solutions for different needs”



2012 Samsung EHS lineup

Type	Outdoor unit												Hydro unit		Domestic Hot Water Tank Unit				Cylinder Unit		Control Kit	Indoor unit										Key features	
	Power/Capacity	5.2kW	6.0kW	7.0kW	8.0kW	9.0kW	10.0kW	11.0kW	12.0kW	14.0kW	16.0kW	8.0kW	16.0kW	Standard		Solar		Standard		-	Model	2.2kW	2.8kW	3.6kW	4.5kW	5.6kW	7.1kW	10kW					
														200L	300L	200L	300L	200L	300L														
<div></div> <div>EHS Mono</div>	1P 220-240V 50Hz					●				●	●	●				●	●	●	●		-										<ul style="list-style-type: none">• Easy installation• Compact and light outdoor unit• Pre-plumbed cylinder unit		
	3P 380-415V 50Hz									●	●	●				●	●	●	●														
<div></div> <div>EHS Split</div>	1P 220-240V 50Hz	●						●		●	●	●	●	●			●	●														<ul style="list-style-type: none">• High reliability- Newly designed fan- Base plate heater(Optional)• Felxibility	
	3P 380-415V 50Hz									●	●	●																					
<div></div> <div>EHS TDM</div>	1P220-240V50Hz			●	●	●			●		●	●	●	●			●	●	●	●			Neo Forte	●	●	●			●	●		<ul style="list-style-type: none">• Integrated heating and cooling system at a lower cost• Perfect all-in-one system• Quick heating by TDM technology• Typical seasonal usage• Flexibility• Wall-mounted, Duct Type Indoor units• Diverse installations	
				●	●	●			●		●	●	●	●			●	●	●	●				Vivace	●	●	●			●	●		
																								Slim Duct	●	●	●	●	●				

‘Introducing Samsung's EHS for residential area’

There has been major addition to Samsung's 2012 EHS system lineups. With the newest EHS mono and split type ready with existing EHS TDM type, now you can choose the perfect type of EHS that suits your needs. Each type of EHS has their own unique and attractive features and we guarantee that you will be greatly satisfied with them.

EHS Mono

Simpler units, installation and usage for maximum convenience!

EHS Mono uses outdoor unit that includes the hydronic parts. Therefore it does not require space or installation process for hydro units and the refrigerant pipes.



Samsung EHS Residential Type



EHS Split

All new EHS Split to satisfy up to date demands.

EHS Split is the newest development added to the line-up to meet the up-to-date demands. This air-to-water heating system is designed and built especially for optimized heating.



EHS TDM

A perfect climate control solution for your home all seasons long.

EHS TDM support both air-to-air and air-to-water heating (and cooling) to be the ultimate indoor climate solution for all seasons long.




Samsung EHS Residential Type

World's top class energy efficiency - Save energy by using it efficiently



Improved compressor and propeller fan with newly adopted heat exchanger has achieved world's top class energy efficiency

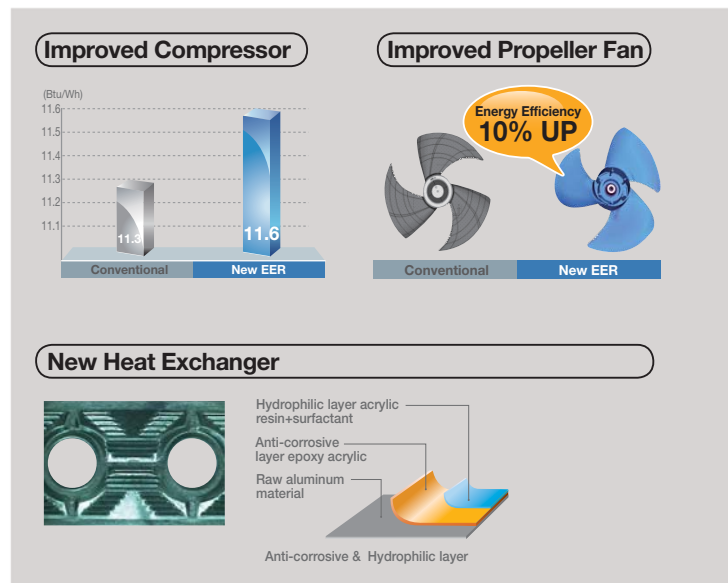

World's Top Class Seasonal COP

SCOP
3.5

COP
4.35

* SCOP is based on SAMSUNG own test result according to VDI4650 standard.

Excellent performance in cold climates
Expect the same performance even in harsh climates

Samsung EHS is more reliable in cold climate countries compared with other products. Samsung EHS provides best heating performance at low ambient temperature, offering heating capacity of approximately 90% at -10°C. Furthermore, if the ambient temperature drops lower, it will trigger defrost operation to prevent the product from freezing.

High Performance of **90%** at -10°C




High heating capacity at low temperature



Samsung EHS provides outstanding heating performance even at low temperature, maximum 40% higher than the competitor's.

* Based on the technical data of each company (Single-phased 14kW model).

Heating Capacity without defrost

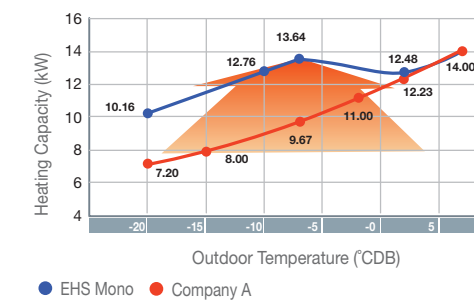


Reliable performance in freezing condition



In freezing outside temperature Samsung EHS will execute defrost operation, (which may take effect on the heating performance) but it will still pull out about 39% better heating capacity than the competitor's product.

* Based on the technical data of each company (Single-phased 14kW model).

Heating Capacity with defrost

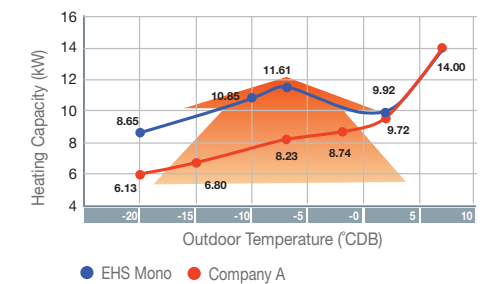

Space reduction of up to 50%

Save extra space, time and money spent unnecessarily



Samsung EHS saves you in terms of the low initial purchase cost and installation fee as well as the space needed for an extra outdoor unit.

* EHS TDM 50%, EHS Mono 40%



Sophisticated remote controller - Remote controller that gives you easy and abundant options

Samsung EHS system is equipped with a simple but complete remote control, with many functions and quick access to statistics, energy consumption and the overall monitoring system.

Providing chances to reduce more energy by letting the customer make some choices insystem using patterns!



Simple standby function at outing

The system in "stand-by mode" stops all of its functions, except for one function that prevents the pipes from breaking/bursting due to weather changes. Additionally, this system can keep the house at a desired temperature even when you are out.



Real-time Energy Consumption Display

5 Eco-level bar indicator shows the level of energy consumption (Solar Panel, Back-Up Boiler and Back-Up Heater of the hydro unit).



Solar panel and Back-up boiler status display "Work in progress" display of Solar panel and Back-up boiler

The system indicates when Solar Panel and Back-Up Boiler are in the process of hybrid heating.




Automatic Anti-Freezing Function

When the house is left unattended for an extended period during the winter and the temperature outside goes down, the system automatically runs its heat pump to keep the water-flow above the sub-freezing point.


EHS Mono

Simpler units, installation and usage for maximum convenience!

EHS Mono uses outdoor unit that includes the hydronic parts. Therefore it does not require space or installation process for hydro units and the refrigerant pipes.

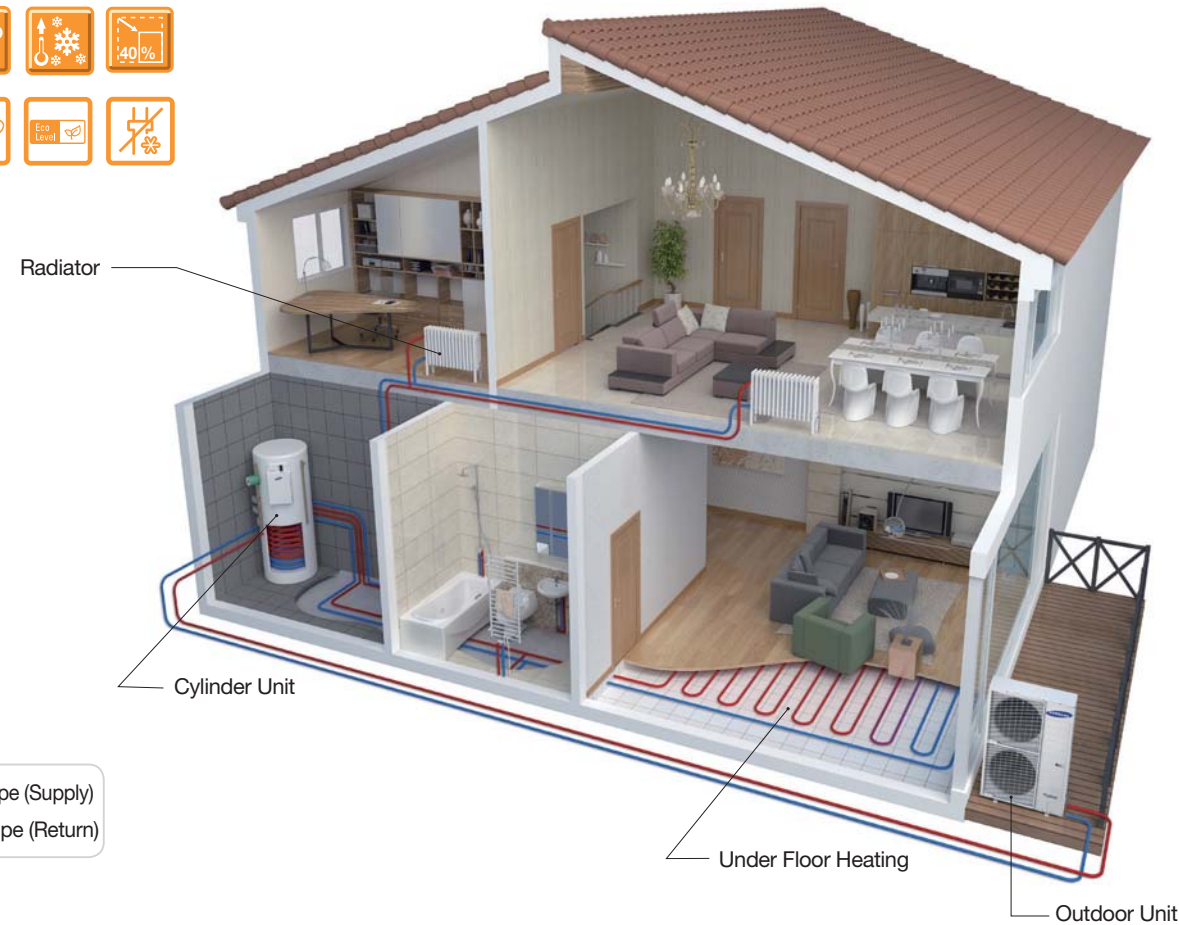

Overview of EHS Mono (Air to Water)

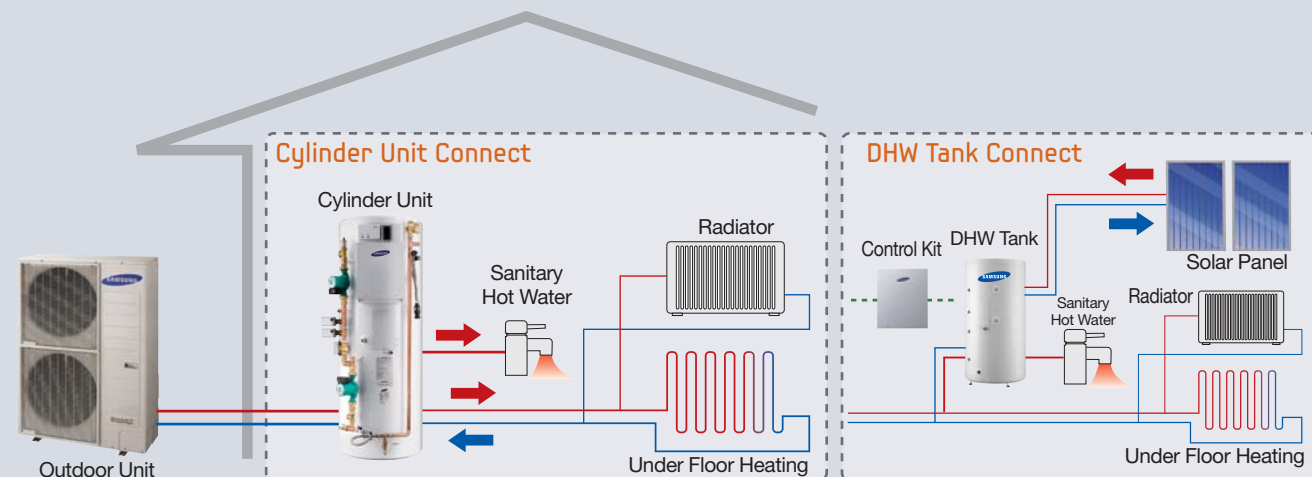

- A2W Space heating and sanitary hot water
- A2W Space cooling (by reversing heating cycle)
- Cools water and supply cold water (by reversing the heating cycle) when needed
- Consist of Outdoor unit and Cylinder unit (Optional)
- Compatible with 2 hybrid energy sources (field supply) : Solar panel/Back-up boiler

Features

High Performance at Low Temperature


Samsung EHS is made up of an inverter compressor optimally operated according to the outdoor temperature, offering heating capacity of 90% at -10°C and reliable antifreezing protection at -20°C.



Compact and light outdoor units

Smaller outdoor units for quick and easy installation

Compact and light outdoor unit units will comparably save installation labor and cost, which will be a great satisfaction to both installer and customers.

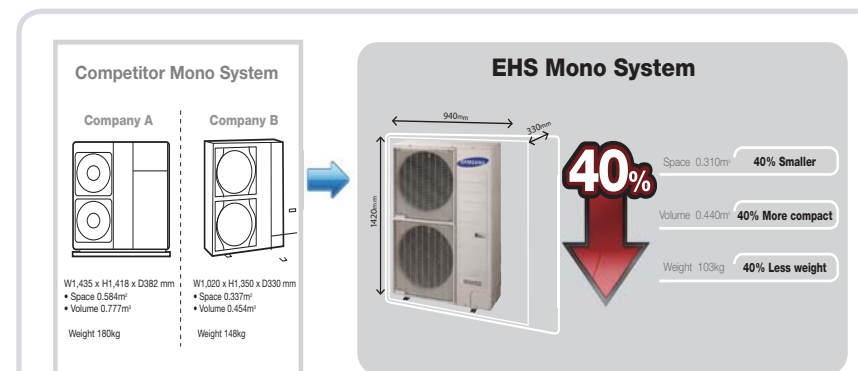


Pre-plumbed cylinder unit

No more time spending on assembling little parts

Samsung Cylinder Unit enables quick and easy installation since most components are assembled in the factory. The Pre-plumbed Cylinder Unit provides a flexible, quick and easy solution.


Cylinder Unit = Water Tank + Control Kit + Water Pump + 2way valves + Air-vent + Relief valve + RF Receiver + Wireless Thermostat + Wired Remote Controller

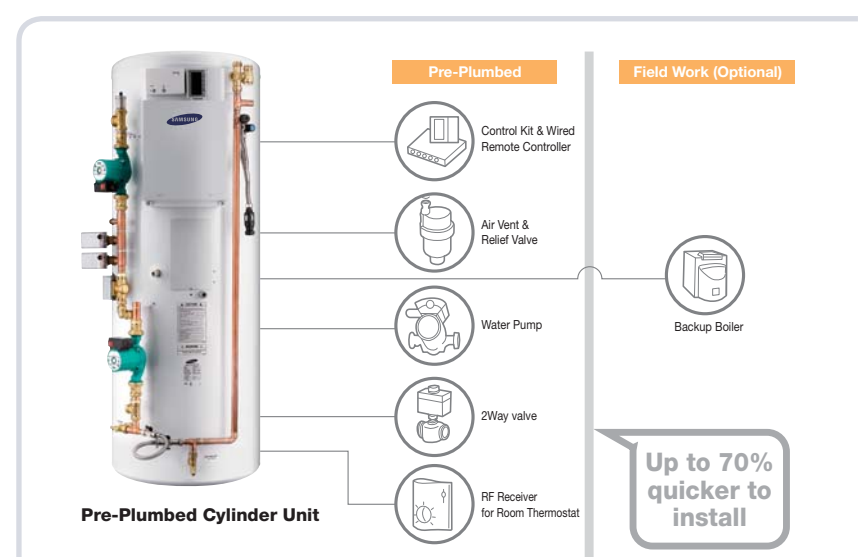


EHS Split

All new EHS Split to satisfy up to date demands.

EHS Split is the newest development added to the line-up to meet the up-to-date demands. This air-to-water heating system is designed and built especially for optimized heating.

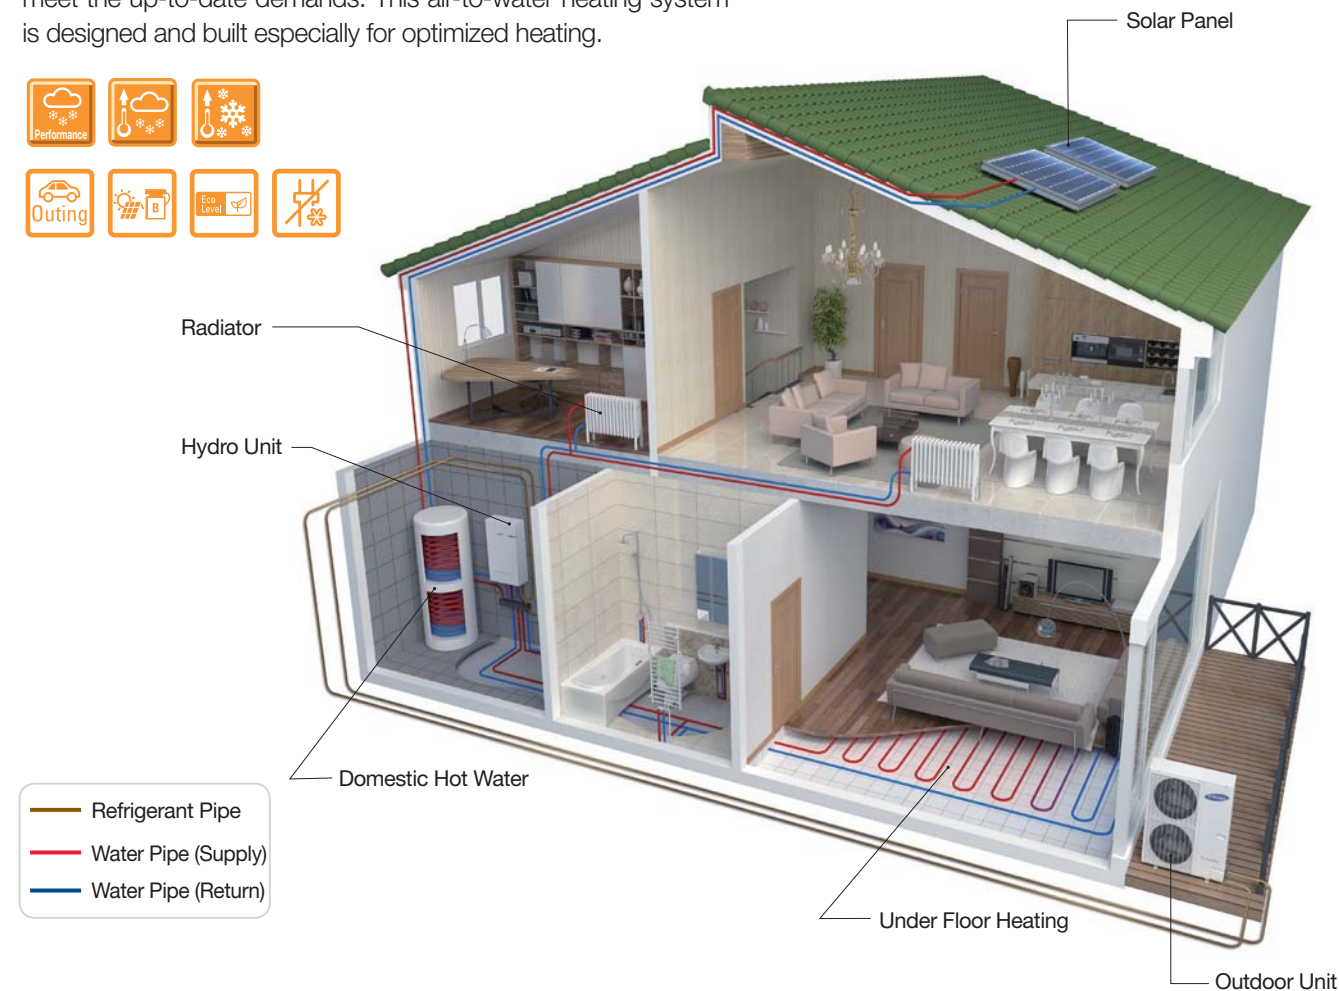

Overview of EHS Split (Air to Water)

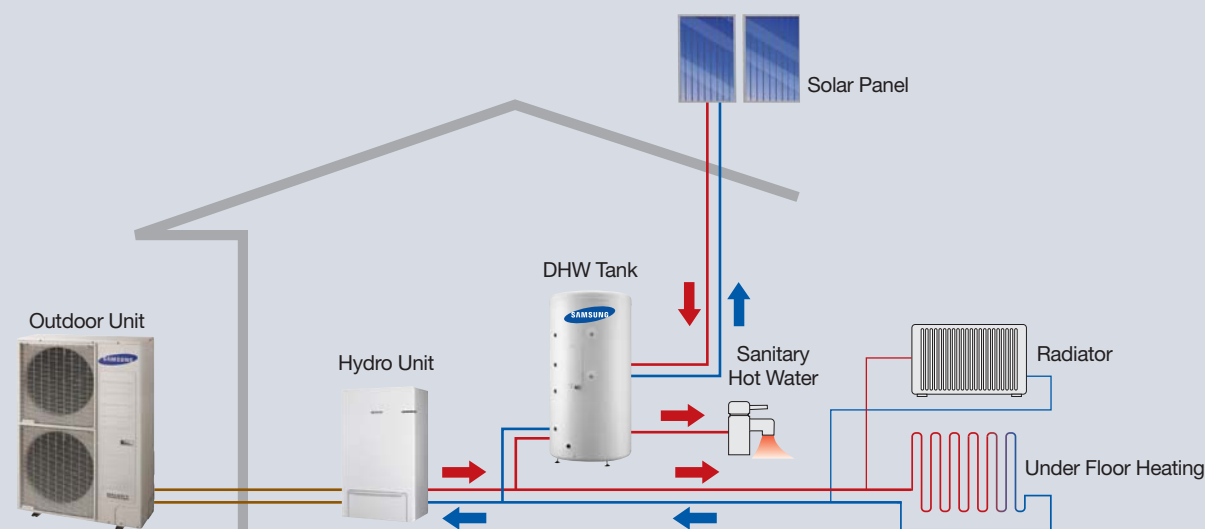

- A2W Space heating and sanitary hot water
- A2W Space cooling (by reversing heating cycle)
- Consist of Outdoor unit, Hydro unit and Cylinder unit (Optional)
- Compatible with 2 hybrid energy sources (field supply): Solar panel/Back-up boiler


Features

Optimized Seasonal Efficiency

Consistently providing efficient performance all seasons long

- Optimizes heating performances at the actual operating temperature, -2°C to 2°C.
- Provides an outstanding SCOP in compliance with Eco-Design directives.

(based on SAMSUNG own test result according to VDI4650 standard)

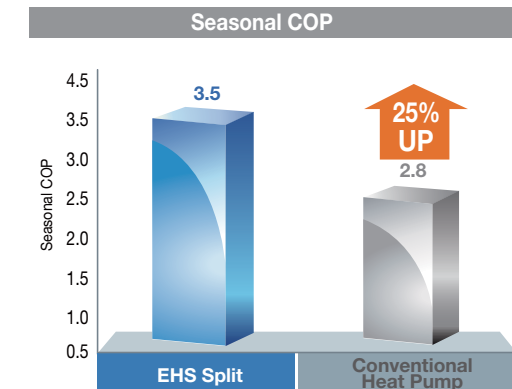

Flexibility

Wide compatibility that allows easier control


Samsung EHS can be implemented with other optional products: Domestic hot water tank, thermostat, pump, solar panel or back-up boiler, which makes it more versatile than ever.



High reliability

Subtle improvements that brings notable difference

Since Samsung EHS system is designed to meet the up to date demands, we have added improvements that may be seem subtle but which adds up to bring notable difference.

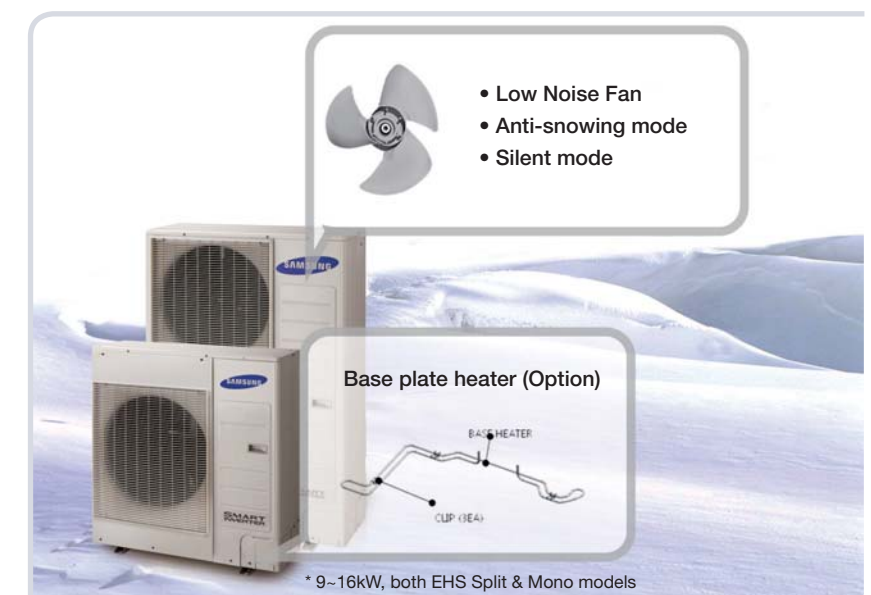


* 9~16kW, both EHS Split & Mono models

EHS TDM


A perfect climate control solution for your home all seasons long.

EHS TDM support both air-to-air and air-to-water heating (and cooling) to be the ultimate indoor climate solution for all seasons long.

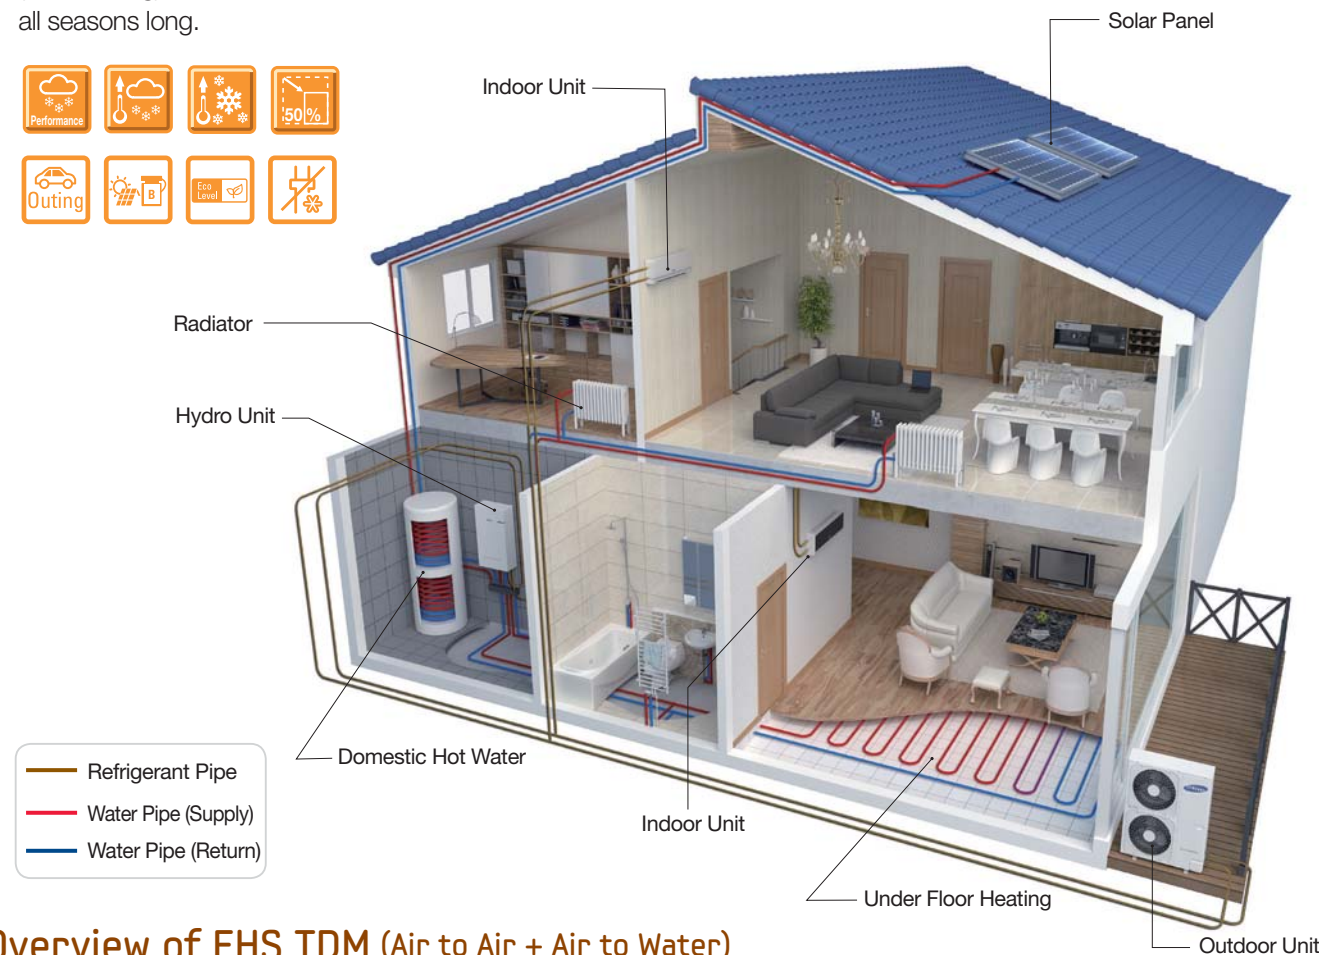

Overview of EHS TDM (Air to Air + Air to Water)

Air to Air + Air to Water

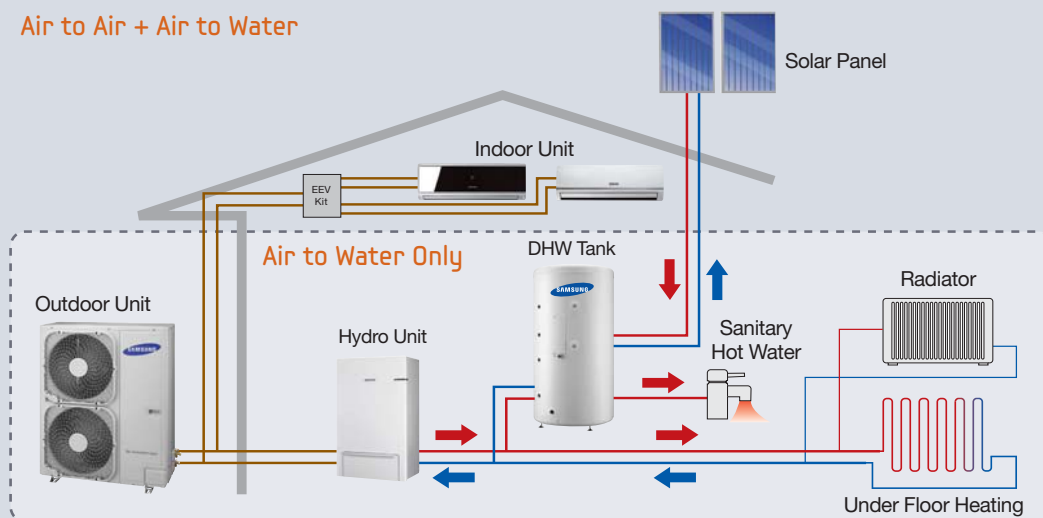

Air to Air + Air to Water

- A2W+A2A Space heating and sanitary hot water
- A2W+A2A Space cooling (by reversing heating cycle)
- Consist of Outdoor unit, hydro unit, DHW tank (optional) and indoor units (Wall mounted and slim duct type)
- Compatible with 2 hybrid energy sources (field supply) : Solar panel/ Back-up boiler

Air to Water Only

- A2W Space heating and sanitary hot water
- A2W Space cooling (by reversing heating cycle)
- Consist of Outdoor unit, hydro unit, DHW tank (optional)
- Compatible with 2 hybrid energy sources (field supply) : Solar panel/ Back-up boiler

Features

Integrated Heating & Cooling System at a Lower Cost

Both water and air are heated and cooled by single outdoor unit



Bringing comfort to your home whilst rapidly achieving a stable temperature. It can also be used for cooling in the summer and heating in the winter.



Bringing comfort to your home with a cost effective and efficient system where energy from the outside air is used to heat your radiator, under floor and sanitary water supply.




Perfect all-in-one system

One outdoor unit is all you need to install


A smart control of Time Division Multi (TDM) operation between air-to-water and air-to-air enables one outdoor unit to operate for both functionalities, resulting in lower product cost and space saving.

Samsung's
New EHS
Technology,
First in
Europe!

Samsung EHS TDM System

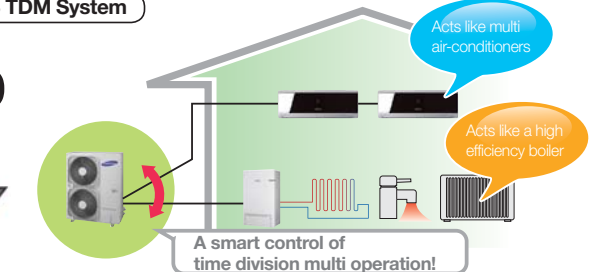


Company A

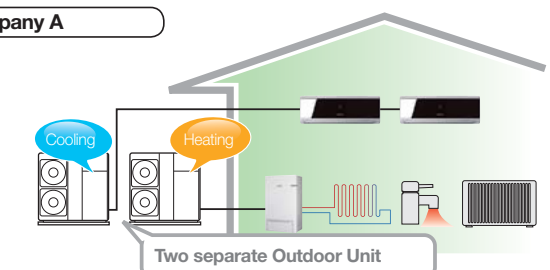

Quick heating by TDM technology

Double up the heating source to feel the warmth faster

Floor heating is well known as the optimal heating option for indoor thermal comfort. However, it takes 4~8 hours to heat up the room after it is turned on. Samsung EHS TDM technology quickens that process by blowing hot air along with floor heating to warm up the room.

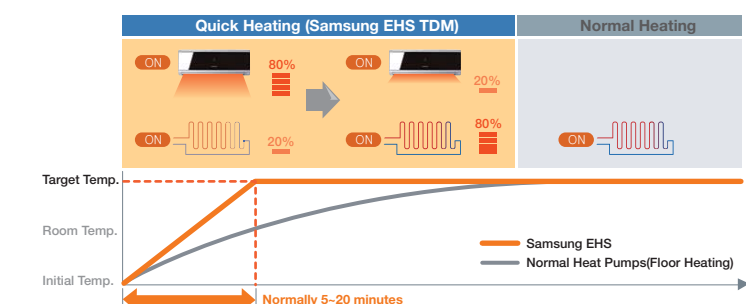

EHS TDM

Simpler units, installation and usage for maximum convenience!

Typical Seasonal Usage

Ultimate air solution for all 4 seasons

Different heating solution is needed for each season with different climate. Samsung EHS can be used all year long, no matter whether it's hot or cold because single outdoor unit can be used for both air-to-water or air-to-air functions for cooling and heating.



Flexibility

Wide compatibility that allows easier control

Samsung EHS can be implemented with other optional products: Domestic hot water tank, thermostat, pump, solar panel or back-up boiler, which makes it more versatile than ever.



Three types of indoor units

Three different types of indoor units to suit your interior

We have carefully selected and added 3 different types of indoor units to the line-up to provide variety of selection. Home owners may choose the best indoor units according to their design taste (for interior) or functional needs.



Vivace

Vivace's sophisticated appearance seamlessly becomes part of your interior design, adding modern elegance to your space with its shadow mirror panel.



Neo Forte

Neo Forte's clean panel design with a unique silver accent adds a touch of class to your space.



Slim Duct


Concealed behind ceilings, Slim Duct enhances the luxurious ambience of your space while providing fresh and powerful cool air.

Features


Diverse installations

Installation for more savings and comfort

Samsung EHS supports diverse installation options. Home owners looking for economical heating system for both new and renovating house may find Samsung EHS attractive since it can replace the existing boiler and provide many installation options to meet their budget.

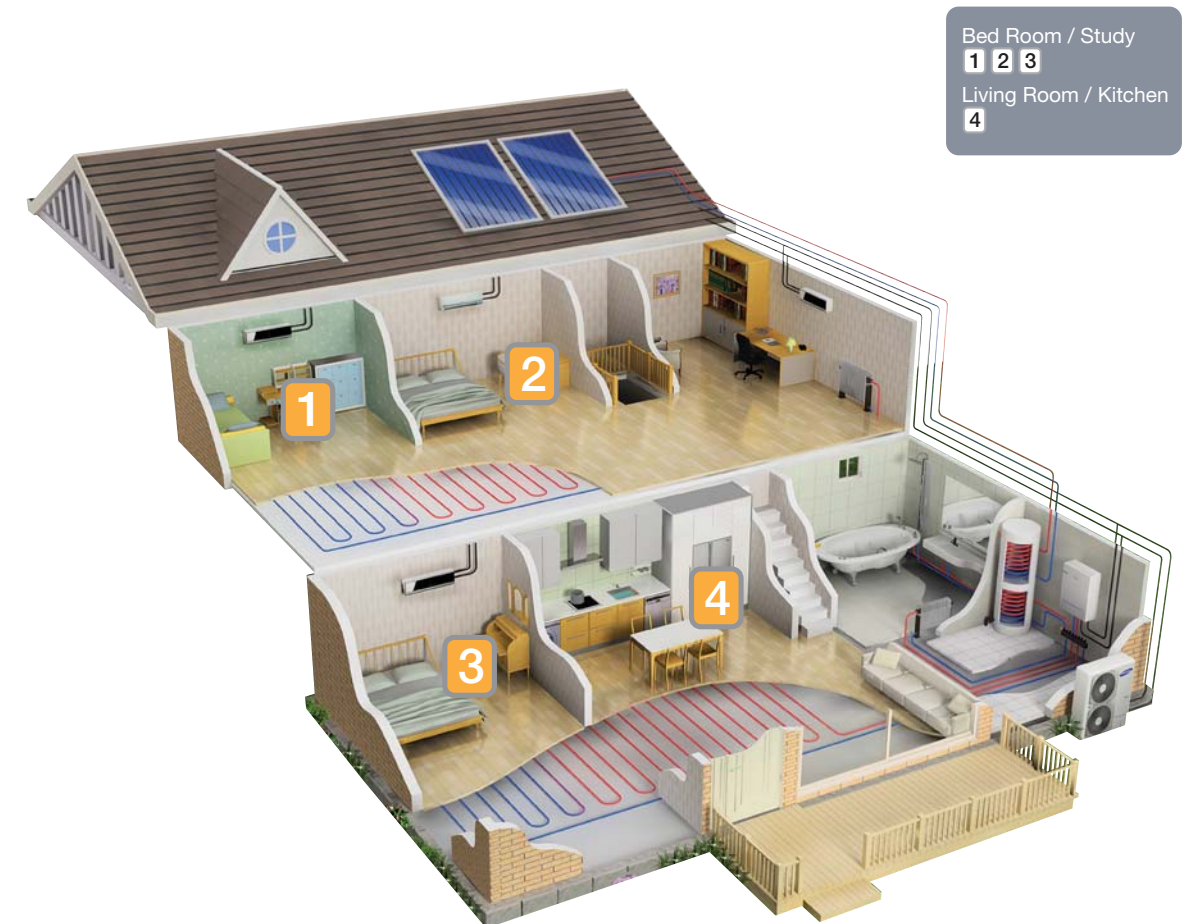


For Existing Houses with Boilers

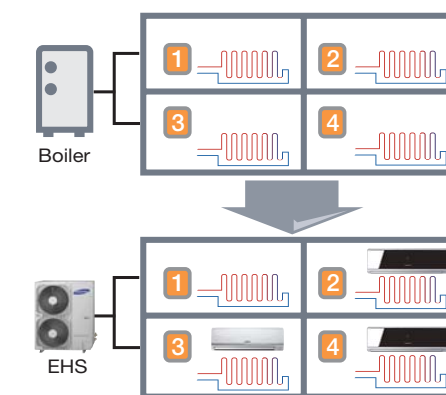

Replace the boiler with Samsung Eco Heating System (EHS) and add air-conditioners where cooling is needed

For New or Renovated Houses

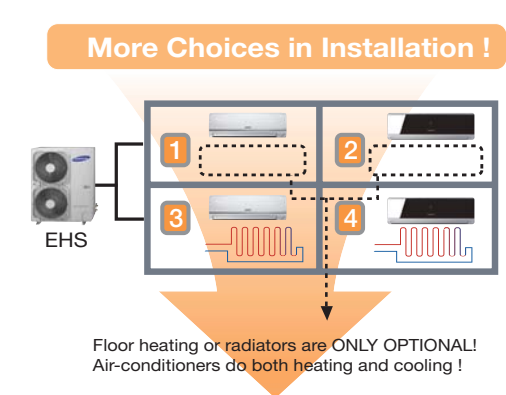

Floor heating or radiators are ONLY OPTIONAL! Air-conditioners do both heating and cooling !

Saving Installation Cost !

Specification

EHS Mono

Outdoor Units



Model Name				RC090MHXEA	RC120MHXEA	RC140MHXEA	RC160MHXEA	RC120MHXGA	RC140MHXGA	RC160MHXGA
Mode			-	Heat Pump (A2W Only)	Heat Pump (A2W Only)	Heat Pump (A2W Only)	Heat Pump (A2W Only)	Heat Pump (A2W Only)	Heat Pump (A2W Only)	Heat Pump (A2W Only)
Power Supply			Ø, #, V, Hz	1, 2, 220-240, 50	1, 2, 220-240, 50	1, 2, 220-240, 50	1, 2, 220-240, 50	3, 4, 380-415, 50	3, 4, 380-415, 50	3, 4, 380-415, 50
Performance (A2W #1)	Nominal Capacity ⁽¹⁾	Heating	W	9,000	12,000	14,000	16,000	12,000	14,000	16,000
			Btu/h	30,700	40,900	47,800	54,600	40,900	47,800	54,600
		Cooling	W	10,000	13,500	16,000	17,000	13,500	16,000	17,000
			Btu/h	34,100	46,100	54,600	58,000	46,100	54,600	58,000
	Nominal Power Input ⁽¹⁾	Heating	W	2,120	2,660	3,290	3,900	2,660	3,290	3,900
		Cooling	W	2,910	4,150	5,430	5970	4150	5,430	5,970
	Nominal Current Input ⁽¹⁾	Heating	A	9.9	11.7	14.4	17.1	4.1	5.1	6.0
		Cooling	A	13.5	17.7	23.2	25.5	6.1	8.2	9.0
	COP (Heating) ⁽¹⁾		W/W	4.25	4.51	4.26	4.10	4.51	4.26	4.10
	EER (Cooling) ⁽¹⁾		W/W	3.44	3.25	2.95	2.85	3.25	2.95	2.85
ESEER ⁽²⁾		W/W	5.60	6.45	6.34	5.98	6.45	6.34	5.98	
Peformance (A2W, Low Temperature)	A2/W35	Heating Capacity	W	6,480	8,810	9,920	11,070	8,810	9,920	11,070
		COP	W/W	3.03	3.22	3.02	2.93	3.22	3.02	2.93
	A-7/W35	Heating Capacity	W	7,200	9,300	11,610	13,180	9,300	11,610	13,180
		COP	W/W	2.28	2.47	2.26	2.22	2.47	2.26	2.22
Electric Specification	MCA		A	22.0	28.0	30.0	32.0	10.0	11.0	12.0
	MFA		A	27.5	35.0	37.5	40.0	12.5	13.8	15.0
Water side	Required Water Pressure		bar	Max. 2.8	Max. 2.8	Max. 2.8	Max. 2.8	Max. 2.8	Max. 2.8	Max. 2.8
	Required Flow Rate		LPM	Min. 16.0	Min. 16.0	Min. 16.0	Min. 16.0	Min. 16.0	Min. 16.0	Min. 16.0
	Piping Connections	In/Out	Ø, inch	1"(BSPP)	1"(BSPP)	1"(BSPP)	1"(BSPP)	1"(BSPP)	1"(BSPP)	1"(BSPP)
Refrigerant Side	Compressor	Type	-	Rotary Inverter	Rotary Inverter	Rotary Inverter	Rotary Inverter	Rotary Inverter	Rotary Inverter	Rotary Inverter
	Oil	Type	-	POE	POE	POE	POE	POE	POE	POE
	Refrigerant	Type	-	R410A	R410A	R410A	R410A	R410A	R410A	R410A
Base Heater	Capacity	-	W	150	150	150	150	150	150	150
Sound	Sound Pressure ⁽³⁾	Heating	dB(A)	50	50	52	53	50	52	53
		Cooling	dB(A)	51	51	53	54	51	53	54
	Sound Power		dB(A)	66	66	68	70	66	68	70
External Dimension	Weight	Net	kg	75	103	103	103	103	103	103
		Gross	kg	83	113	113	113	113	113	113
	Dimensions (WxHxD)	Net	mm	940x998x330	940x1,420x330	940x1,420x330	940x1,420x330	940x1,420x330	940x1,420x330	940x1,420x330
		Gross	mm	995x1,096x426	995x1,548x426	995x1,548x426	995x1,548x426	995x1,548x426	995x1,548x426	995x1,548x426
Operating Range	Ambient (A2W)	Heating	°C	-20~35	-20~35	-20~35	-20~35	-20~35	-20~35	-20~35
		Cooling	°C	10~46	10~46	10~46	10~46	10~46	10~46	10~46
		DHW	°C	-20~43	-20~43	-20~43	-20~43	-20~43	-20~43	-20~43
	Leaving Water	Heating	°C	25~55	25~55	25~55	25~55	25~55	25~55	25~55
		Cooling	°C	5~25	5~25	5~25	5~25	5~25	5~25	5~25

*1~2) A2W rating conditions in accordance with Eurovent Rating Standard for Liquid Chilling Packages RS-6/C/001-2011.
*1) A2W Condition #1 : (Heating) Water In/Out 30°C/35°C, Outdoor Air 7°CDB/6°CWB; (Cooling) Water In/Out 23°C/18°C, Outdoor Air DB 35°C.
*2) A2W Condition for ESEER (Cooling) at Water Out 7°C.
*3) Sound Pressure was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

Cylinder Units



Model Name			Standard	
			NH200CHXEA	NH300CHXEA
Pressure Vessel	Material Quality	-	AISI 444 / DIN 1.4521	
	Volume Capacity	Liter	192	279
Power Supply		Ø, V, Hz	1, 220-240, 50	
Electric Element	Capacity	kW	3.0	
	Material	-	Incoloy 825	
	Thermostat #1 (Auto)	°C	40-70 (60 preset)	
	Thermostat #2 (Manual)	°C	91	
Heating Coil	Material Quality	-	Duplex LDX 2101	
	Heating Area	m ²	0.8	
Heating Coil for Solar	Material Quality	-	N/A	
	Heating Area	m ²	N/A	
Insulation	Material Quality	-	PUR	
	Thickness	mm	40	
Insulation Jacket	Material Quality	-	Epoxy-coated mild steel-white	
Dimensions Overall		W x H x D	mm	692 x 1,200 x 702 692 x 1,600 x 702
Connections	Cold Water Inlet (pipe)	Ø, mm	22	
	Hot Water Outlet	Ø, inch	3/4" (BSPP)	
	Flow & Return (pipe)	Ø, mm	28	
	Sensor Poket(s)	mm	Ø8.05mm Inside, 1/2" Thread	
Weight	Net	kg	67	80
	Gross	kg	-	-
Max. Water Temperature		°C	70	
Pre-plumbed parts	Water Pump	-	Wilo RS 25/7	
	2Way Valve	-	Honeywell V4043	
	Temp. & Pressure Relief Valve	-	90°C & 10.0 bar	
	Pressure Reducing Valve	bar	3.0	
	Relief Pressure	bar	2.1	
	Strainer	mesh	25	
Packaged part	Flow Switch	-	Sika VH9342	
Room Thermostat & Receiver	Wireless Room Thermostat	-	Danfoss TP5000 Si RF	
	RF Receiver for Thermostat	-	Danfoss RX1	
Timer Controller		-	Danfoss FP715 Si	
Other	Packaging	-	Eco Foam-PUF	
	Adjustable Legs	pcs	3	

Control Kit



Model Name				MIM-E03A	
Use with				-	EHS Mono Type
Power Supply				Ø, V, Hz	1, 220-240, 50
External Dimension	Weight	Net	kg	3.5	
		Gross	kg	5.7	
	Dimensions (WxHxD)	Net	mm	290x342x110	
		Gross	mm	330x440x170	
External Control	Booster Heater			-	AC 230V (Max 20A)
	Back up Heater / Boiler			-	AC 230V (Max 0.5A)
	Water Pump			-	AC 230V (Max 2A)
	2Way or 3Way Valve			-	AC 230V (Max 0.5A / 120W)
	Room Thermostat			-	AC 230V (Max 10mA)
	Solar Pump			-	AC 230V (Max 10mA)

Specification

EHS Split Outdoor Units



Model Name				AEX060EDEHA/EU	AEX100EDEHA/EU	AEX125EDEHA/EU	AEX140EDEHA/EU	AEX160EDEHA/EU		AEX125EDGHA/EU	AEX140EDGHA/EU	AEX160EDGHA/EU
Hydro Unit			-	AEN080YDEHA/EU	AEN080YDEHA/EU	AEN160YDEHA/EU	AEN160YDEHA/EU	AEN160YDEHA/EU		AEN160YDGHA/EU	AEN160YDGHA/EU	AEN160YDGHA/EU
Mode			-	"Heat Pump (A2W Only)"	"Heat Pump (A2W Only)"	"Heat Pump (A2W Only)"	"Heat Pump (A2W Only)"	"Heat Pump (A2W Only)"		"Heat Pump (A2W Only)"	"Heat Pump (A2W Only)"	"Heat Pump (A2W Only)"
Power Supply			Ø, #, V, Hz	1, 2, 220-240, 50	1, 2, 220-240, 50	1, 2, 220-240, 50	1, 2, 220-240, 50	1, 2, 220-240, 50		3, 4, 380-415, 50	3, 4, 380-415, 50	3, 4, 380-415, 50
Performance (A2W #1)	Nominal Capacity ⁽¹⁾	Heating	W	5,800	10,000	12,500	14,000	16,000		12,500	14,000	16,000
			Btu/h	19,800	34,100	42,700	47,800	54,600		42,700	47,800	54,600
		Cooling	W	6,670	9,100	15,000	16,200	18,680		15,000	16,200	18,680
			Btu/h	22,800	31,000	51,200	55,300	63,700		51,200	55,300	63,700
	Nominal Power Input ⁽¹⁾	Heating	W	1,280	2,280	2,700	3,150	3,760		2,700	3,150	3,760
		Cooling	W	1,970	2,950	4,390	5,180	5,440		4,390	5,180	5,440
	Nominal Current Input ⁽¹⁾	Heating	A	5.7	9.70	11.70	13.70	16.30		4.20	4.90	5.80
		Cooling	A	8.8	12.70	19.10	22.60	26.40		6.80	8.10	9.40
	COP(Heating) ⁽¹⁾		W/W	4.53	4.39	4.63	4.44	4.26		4.63	4.44	4.26
	EER(Cooling) ⁽¹⁾		W/W	3.39	3.08	3.42	3.13	3.43		3.42	3.13	3.43
ESEER ⁽²⁾		W/W	4.50	4.60	4.80	4.75	4.70		4.80	4.75	4.70	
Peformance (A2W, Low Temperature)	A2/W35	Heating Capacity	W	4,600	8,500	9,800	11,200	12,500		9,800	11,200	12,500
		COP	W/W	3.31	3.35	3.28	3.25	3.14		3.28	3.25	3.14
	A-7/W35	Heating Capacity	W	5,100	8,700	10,300	11,800	13,400		10,300	11,800	13,400
		COP	W/W	2.49	2.43	2.57	2.55	2.50		2.57	2.55	2.50
Electric Specification	MCA		A	20.0	22.0	28.0	30.0	32.0		10.0	11.0	12.0
	MFA		A	25.0	27.5	35.0	37.5	40.0		12.5	13.8	15.0
Refrigerant Side	Compressor	Type	-	Rotary Inverter	Rotary Inverter	Rotary Inverter	Rotary Inverter	Rotary Inverter		Rotary Inverter	Rotary Inverter	Rotary Inverter
		Model	-	UG4T200FUAE4	UG8T300FUBJU	UG5T450FUEJX	UG5T450FUEJX	UG5T450FUEJX		UG5T450FUEJX	UG5T450FUEJX	UG5T450FUEJX
	Oil	Type	-	POE	POE	POE	POE	POE		POE	POE	POE
	Refrigerant	Type	-	R410A	R410A	R410A	R410A	R410A		R410A	R410A	R410A
		Liquid	Ø, mm (inch)	6.35 (1/4")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")		9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
	Piping Connections	Gas	Ø, mm (inch)	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")		15.88 (5/8")	15.88 (5/8")	15.88 (5/8")
		Installation Limitation	Length	m	30	50	50	50		50	50	50
		Height	m	20	30	30	30		30	30	30	
Base Heater (option)		Capacity	W	N/A	150	150	150	150		150	150	150
Sound	Sound Pressure ⁽³⁾	Heating	dB(A)	53	50	50	50	53		50	50	53
		Cooling	dB(A)	54	52	51	53	54		51	53	54
	Sound Power		dB(A)	62	66	64	66	68		64	66	68
External Dimension	Weight	Net	kg	47.5	74	98	98	98		98	98	98
		Gross	kg	52.5	82	108	108	108		108	108	108
	Dimensions (WxHxD)	Net	mm	880 x 638 x 310	940 x 998 x 330	940 x 1,420 x 330	940 x 1,420 x 330	940 x 1,420 x 330		940 x 1,420 x 330	940 x 1,420 x 330	940 x 1,420 x 330
		Gross	mm	1,024 x 750 x 414	995 x 1,096 x 426	995 x 1,548 x 426	995 x 1,548 x 426	995 x 1,548 x 426		995 x 1,548 x 426	995 x 1,548 x 426	995 x 1,548 x 426
Operating Range	Ambient (A2W)	Heating	°C	-20~-35	-20~-35	-20~-35	-20~-35	-20~-35		-20~-35	-20~-35	-20~-35
		Cooling	°C	10~46	10~46	10~46	10~46	10~46		10~46	10~46	10~46
		DHW	°C	-20~43	-20~43	-20~43	-20~43	-20~43		-20~43	-20~43	-20~43
	Leaving Water	Heating	°C	25~55	25~55	25~55	25~55	25~55		25~55	25~55	25~55
		Cooling	°C	5~25	5~25	5~25	5~25	5~25		5~25	5~25	5~25

*1)~*3) A2W rating conditions in accordance with Eurovent Rating Standard for Liquid Chilling Packages RS-6/C/001-2011.

*1) A2W Condition #1 : (Heating) Water In/Out 30°C/35°C, Outdoor Air DB/WB 7°C/6°C; (Cooling) Water In/Out 23°C/18°C, Outdoor Air DB 35°C.

*2) A2W Condition for ESEER(Cooling) at Water Out 7°C.

*3) Sound Pressure was acquired in a dead room. Thus actual noise level may be different depending on the installation conditions.

Hydro Units

Model Name				AEN080YDEHA/EU	AEN160YDEHA/EU	AEN160YDGHA/EU
Power Supply			Ø, V, Hz	1, 220~240, 50 3, 380-415, 50	1, 220~240, 50 3, 380-415, 50	1, 220~240, 50 3, 380-415, 50
Performance	Nominal Capacity	Heating	W	5,200 / 10,000	12,500 / 14,000 / 16,000	12,500 / 14,000 / 16,000
		Cooling	W	5,000 / 9,000	11,200 / 12,500 / 14,000	11,200 / 12,500 / 14,000
	Leaving Water Temperature Range	Heating	°C	15~55 (H/P : 25~55)	15~55 (H/P : 25~55)	15~55 (H/P : 25~55)
		Cooling	°C	5~25	5~25	5~25
Water Side	Required Water Pressure		bar	Max. 3.0	Max. 3.0	Max. 3.0
	Required Flow Rate		LPM	Min 12.0	Min. 16.0	Min. 16.0
	Piping Connections	In/Out	Ø, inch	1 1/4" (BSPP)	1 1/4" (BSPP)	1 1/4" (BSPP)
Refrigerant Side	Piping Connections	Liquid	Ø, mm (inch)	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
		Gas	Ø, mm (inch)	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")
Hydro Parts	Water Pump	Flow Rate	kg/min	17.0 / 20.5 / 23.0	31.5 / 40.1 / 45.9	31.5 / 40.1 / 45.9
	Electric Heater	Input Power	W	4,000	6,000	6,000
	Expansion Vessel	Volume	Liter	8	8	8
	Pressure Relief Valve	Relief Pressure	bar	2.9	2.9	2.9
	Air Purge Valve	Size	Ø, inch	3/8" (BSPP male)	3/8" (BSPP male)	3/8" (BSPP male)
	Service Valve	Size	Ø, inch	1 1/4" (BSPP male)	1 1/4" (BSPP male)	1 1/4" (BSPP male)
External Dimension	Weight	Net	kg	45	48	45
		Gross	kg	55	58	55
	Dimensions (WxHxD)	Net	mm	510x850x315	510x850x315	510x850x315
		Gross	mm	564x1,024x412	564x1,024x412	564x1,024x412
External Control	Back up Boiler		-	230VAC 1A(DO)	230VAC 1A(DO)	230VAC 1A(DO)
	Room Thermostat		-	230VAC 1A(DI)	230VAC 1A(DI)	230VAC 1A(DI)
	Solar Pump		-	230VAC 1A(DI)	230VAC 1A(DI)	230VAC 1A(DI)
	Valves, 2 or 3Way		-	230VAC 1A(DO)	230VAC 1A(DO)	230VAC 1A(DO)



Specification

EHS TDM

Outdoor Units



Model Name				RD060PHXEA	RD070PHXEA	RD080PHXEA	RD110PHXEA	RD140PHXEA	RD160PHXEA
Hydro Unit			-	NH080PHXEA	NH080PHXEA	NH080PHXEA	NH160PHXEA	NH160PHXEA	NH160PHXEA
Mode			-	Heat Pump (A2A/A2W Multi)	Heat Pump (A2A/A2W Multi)	Heat Pump (A2A/A2W Multi)	Heat Pump (A2A/A2W Multi)	Heat Pump (A2A/A2W Multi)	Heat Pump (A2A/A2W Multi)
Power Supply			Ø, #, V, Hz	1, 2, 220-240, 50	1, 2, 220-240, 50	1, 2, 220-240, 50	1, 2, 220-240, 50	1, 2, 220-240, 50	1, 2, 220-240, 50
Performance (A2W #1)	Nominal Capacity ⁽¹⁾	Heating	W	5,990	6,980	7,970	11,000	13,900	15,900
			Btu/h	20,400	23,800	27,200	37,500	47,400	54,300
		Cooling	W	7,020	7,530	8,030	11,300	13,070	10,200
			Btu/h	24,000	25,700	27,400	38,600	44,600	34,800
	Nominal Power Input ⁽¹⁾	Heating	W	1,360	1,640	1,970	2,520	3,260	3,930
		Cooling	W	1,990	2,240	2,570	2,890	3,000	3,510
	Nominal Current Input ⁽¹⁾	Heating	A	6.0	7.3	8.8	10.7	14.2	17.3
		Cooling	A	8.9	10.1	11.6	12.9	17.5	20.8
	COP (Heating) ⁽¹⁾		W/W	4.40	4.26	4.05	4.37	4.26	4.05
	EER (Cooling) ⁽¹⁾		W/W	3.53	3.36	3.12	3.91	4.36	2.91
ESEER ⁽²⁾		W/W	5.20	5.50	4.90	5.96	5.66	5.50	
Peformance (A2W, Low Temperature)	A2/W35	Heating Capacity	W	4,410	5,200	5,970	7,960	9,650	10,620
		COP (Heating)	W/W	3.55	3.49	3.35	3.28	3.24	3.01
	A-7/W35	Heating Capacity	W	5,450	6,200	7,000	9,100	9,500	9,600
		COP (Heating)	W/W	2.58	2.48	2.41	2.46	2.32	2.13
Performance (A2A)	Nominal Capacity	Cooling	W	3,000~6,000	3,500~7,000	4,000~8,000	6,000~11,000	6,400~14,000	6,400~14,000
			Btu/h	10,200~20,500	11,900~23,900	13,600~27,300	20,500~37,500	21,800~47,800	21,800~47,800
	Allowable No. of Indoor Units		EA	Max. 3	Max. 3	Max. 3	Max. 4	Max. 4	Max. 4
	COP (Heating) ⁽³⁾		W/W	4.04	4.04	4.04	3.94	3.94	3.94
EER (Cooling) ⁽³⁾		W/W	3.21	3.21	3.21	3.46	3.46	3.46	
Electric Specification	MCA		A	13.50	16.00	18.00	25.00	28.00	30.00
	MFA		A	16.88	20.00	22.50	31.25	35.00	37.50
Refrigerant Side	Compressor	Type	-	Rotary Inverter	Rotary Inverter	Rotary Inverter	Rotary Inverter	Rotary Inverter	Rotary Inverter
	Oil	Type	-	POE	POE	POE	POE	POE	POE
	Refrigerant	Type	-	R410A	R410A	R410A	R410A	R410A	R410A
	Piping Connections	Liquid	Ø, mm (inch)	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
		Gas	Ø, mm (inch)	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")
	Installation Limitation	Length	m	30	30	30	70	70	70
Height		m	15	15	15	30	30	30	
Sound	Sound Pressure ⁽⁴⁾	Heating	dB(A)	48	48	49	49	51	53
		Cooling	dB(A)	48	48	50	50	52	54
External Dimension	Weight	Net	kg	71	71	71	108	108	108
		Gross	kg	79	79	79	116	116	116
	Dimensions (WxHxD)	Net	mm	880x798x310	880x798x310	880x798x310	932x1,128x375	932x1,128x375	932x1,128x375
		Gross	mm	1,023x891x413	1,023x891x413	1,023x891x413	1,091x1,286x472	1,091x1,286x472	1,091x1,286x472
Operating Range	Ambient (A2W)	Heating	°C	-20~35	-20~35	-20~35	-20~35	-20~35	-20~35
		Cooling	°C	10~46	10~46	10~46	10~46	10~46	10~46
		DHW	°C	-20~43	-20~43	-20~43	-20~43	-20~43	-20~43
	Ambient (A2A)	Heating	°C	-20~24	-20~24	-20~24	-20~24	-20~24	-20~24
Cooling		°C	10~43	10~43	10~43	10~43	10~43	10~43	

*1~3) A2W rating conditions in accordance with Eurovent Rating Standard for Liquid Chilling Packages RS-6/C/001-2011.
*1) A2W Condition #1 : (Heating) Water In/Out 30°C/35°C, Outdoor Air 7°CDB/6°CWB; (Cooling) Water In/Out 23°C/18°C, Outdoor Air DB 35°C.
*2) A2W Condition for ESEER (Cooling) at Water Out 7°C.
*3) A2A Condition : (Heating) Indoor Air 20°CDB/15°CWB, Outdoor Air 7°CDB/6°CWB; (Cooling) Indoor Air 27°CDB/19°CWB, Outdoor Air 35°CDB/24°CWB.
*4) Sound Pressure was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

Hydro Units



Model Name				NH080PHXEA	NH160PHXEA
Power Supply		Ø, V, Hz		1, 220~240, 50	1, 220~240, 50
Performance	Nominal Capacity	Heating	W	6,000 / 7,000 / 8,000	11,000 / 14,000 / 16,000
		Cooling	W	7,000 / 7,500 / 8,000	11,300 / 14,200 / 15,500
	Leaving Water Temperature Range	Heating	°C	15~55 (H/P : 25~55)	15~55 (H/P : 25~55)
		Cooling	°C	5~25	5~25
Water Side	Required Water Pressure		bar	Max. 3.0	Max. 3.0
	Required Flow Rate		LPM	Min. 12.0	Min. 16.0
	Piping Connections	In/Out	Ø, inch	1 1/4" (BSPP)	1 1/4" (BSPP)
Refrigerant Side	Piping Connections	Liquid	Ø, mm (inch)	9.52 (3/8")	9.52 (3/8")
		Gas	Ø, mm (inch)	15.88 (5/8")	15.88 (5/8")
Hydro Parts	Water Pump	Flow Rate	kg/min	17.0 / 20.5 / 23.0	31.5 / 40.1 / 45.9
	Electric Heater	Input Power	W	4,000	6,000
	Expansion Vessel	Volume	Liter	8.0	8.0
	Pressure Relief Valve	Relief Pressure	bar	2.9	2.9
	Air Purge Valve	Size	Ø, inch	3/8" (BSPP male)	3/8" (BSPP male)
	Service Valve	Size	Ø, inch	1 1/4" (BSPP male)	1 1/4" (BSPP male)
		Net	kg	45	48
External Dimension	Weight	Gross	kg	55	58
		Net	mm	510x850x315	510x850x315
	Dimensions (WxHxD)	Gross	mm	564x1,024x412	564x1,024x412
External Control	Back up Boiler		-	230VAC 1A (DO)	230VAC 1A (DO)
	Room Thermostat		-	230VAC 1A (DI)	230VAC 1A (DI)
	Solar Pump		-	230VAC 1A (DI)	230VAC 1A (DI)
	Valves, 2 or 3Way		-	230VAC 1A (DO)	230VAC 1A (DO)



DHW Tanks

Model Name			Standard		Solar Connected	
			NH200WHXEA	NH300WHXEA	NH200WHXES	NH300WHXES
Pressure Vessel	Material Quality	-	AISI 444 / DIN 1.4521		AISI 444 / DIN 1.4521	
	Volume Capacity	Liter	198	287	198	287
Power Supply		Ø, V, Hz	1, 220-240, 50		1, 220-240, 50	
Electric Element	Capacity	kW	2.6		2.6	
	Material	-	Incoloy 825		Incoloy 825	
	Thermostat #1 (Auto)	°C	-		-	
	Thermostat #2 (Manual)	°C	-		-	
Heating Coil	Material Quality	-	Duplex LDX 2101		Duplex LDX 2101	
	Heating Area	m²	0.71		0.71	
Heating Coil for Solar	Material Quality	-	-		Duplex LDX 2101	
	Heating Area	m²	-		0.47	
Insulation	Material Quality	-	Polyrethane form		Polyrethane form	
	Thickness	mm	40		40	
Insulation Jacket	Material Quality	-	Epoxy-Coated Mild Steel-White		Epoxy-Coated Mild Steel-White	
Dimensions Overall	Diameter	mm	585	585	585	585
	Height	mm	1,130	1,580	1,130	1,580
Connections	Cold Water Inlet	Ø, inch	3/4" (BSPP)		3/4" (BSPP)	
	Hot Water Outlet	Ø, inch	3/4" (BSPP)		3/4" (BSPP)	
	Flow & Return	mm	3/4" Female		3/4" Female	
	Sensor Pocket(s)	mm	Ø8mm Inside, 1/2" Thread		Ø8mm Inside, 1/2" Thread	
Weight	Net	kg	-	-	-	-
	Gross	kg	47	61	51	65
Max. Water Temperature		°C	70		70	
Other	Packaging	-	Eco Foam-PUF		Eco Foam-PUF	
	Adjustable Legs	pcs	3		3	

Specification

EHS TDM

Indoor Units

Vivace



Model Name				NH022VHXEA	NH028VHXEA	NH036VHXEA	NH056VHXEA	NH071VHXEA
Power Supply			Ø, V, Hz	1, 220~240, 50	1, 220~240, 50	1, 220~240, 50	1, 220~240, 50	1, 220~240, 50
Performance	Nominal Capacity	Cooling ^{*1)}	W	2,200	2,800	3,600	5,600	6,800
		Heating ^{*2)}	W	2,500	3,200	4,000	6,300	7,000
	Nominal Input		W	30	30	35	50	50
	Running Current		A	0.13	0.18	0.19	0.30	0.30
Sound	Sound Pressure ^{*3)} High/Low		dB(A)	31/21	31/21	35/21	40/30	41/30
Fan	Type		-	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan
Airflow Rate	Cooling	High	CMM	7.0	7.0	8.2	13.3	13.3
	Heating	High	CMM	7.3	7.3	8.8	14.0	14.0
	ESP	Std. (Min.~Max.)	mmAq	-	-	-	-	-
Refrigerant Side	Type		-	R410A	R410A	R410A	R410A	R410A
	Control Method		-	EEV	EEV	EEV	EEV	EEV
	Piping Connections	Liquid (Flare)	Ø, mm (inch)	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	9.52 (3/8")
		Gas (Flare)	Ø, mm (inch)	12.70 (1/2")	12.70 (1/2")	12.70 (1/2")	12.70 (1/2")	15.88 (5/8")
		Drain	Ø, mm	ID 18 hose	ID 18 hose	ID 18 hose	ID 18 hose	ID 18 hose
External Dimension	Weight	Net	kg	8.5	8.5	8.5	12.0	15.0
		Gross	kg	11.5	11.5	11.5	15.0	15.0
	Dimensions (WxHxD)	Net	mm	825x285x189	825x285x189	825x285x189	1,065x298x218	1,065x298x218
		Gross	mm	900x349x252	900x349x252	900x349x252	1,137x377x299	1,137x377x299


*1) Nominal cooling capacities are based on ; Indoor Air 27°CDB/19°CWB, Outdoor Air 35°CDB/24°CWB, Equivalent refrigerant piping 7.5m, Level differences 0m.
*2) Nominal heating capacities are based on ; Indoor Air 20°CDB/15°CWB, Outdoor Air 7°CDB/6°CWB, Equivalent refrigerant piping 7.5m, Level differences 0m.
*3) Sound Pressure was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.



Neo Forte

Model Name				NH022NHXEA	NH028NHXEA	NH036NHXEA	NH056NHXEA	NH071NHXEA
Power Supply			Ø, V, Hz	1, 220~240, 50	1, 220~240, 50	1, 220~240, 50	1, 220~240, 50	1, 220~240, 50
Performance	Nominal Capacity	Cooling ^{*1)}	W	2,200	2,800	3,600	5,600	6,800
		Heating ^{*2)}	W	2,500	3,200	4,000	6,300	7,000
	Nominal Input		W	25	25	30	45	50
	Running Current		A	0.18	0.18	0.18	0.27	0.30
Sound	Sound Pressure ^{*3)} High/Low		dB(A)	32/23	32/23	36/23	40/30	41/30
Fan	Type		-	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan
Airflow Rate	Cooling	High	CMM	7.8	7.8	9.3	12.0	14.0
	Heating	High	CMM	8.2	8.2	9.5	13.0	15.0
	ESP	Std. (Min.~Max.)	mmAq	-	-	-	-	-
				-	-	-	-	-
Refrigerant Side	Type		-	R410A	R410A	R410A	R410A	R410A
	Control Method		-	EEV	EEV	EEV	EEV	EEV
	Piping Connections	Liquid (Flare)	Ø, mm (inch)	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	9.52 (3/8")
		Gas (Flare)	Ø, mm (inch)	12.70 (1/2")	12.70 (1/2")	12.70 (1/2")	12.70 (1/2")	15.88 (5/8")
		Drain	Ø, mm	ID 18 hose	ID 18 hose	ID 18 hose	ID 18 hose	ID 18 hose
External Dimension	Weight	Net	kg	7.8	7.8	7.8	13.0	13.0
		Gross	kg	9.4	9.4	9.4	16.0	16.0
	Dimensions (WxHxD)	Net	mm	825x285x189	825x285x189	825x285x189	1,065x298x218	1,065x298x218
		Gross	mm	900x349x252	900x349x252	900x349x252	1,137x377x299	1,137x377x299

*1) Nominal cooling capacities are based on ; Indoor Air 27°CDB/19°CWB, Outdoor Air 35°CDB/24°CWB, Equivalent refrigerant piping 7.5m, Level differences 0m.
*2) Nominal heating capacities are based on ; Indoor Air 20°CDB/15°CWB, Outdoor Air 7°CDB/6°CWB, Equivalent refrigerant piping 7.5m, Level differences 0m.
*3) Sound Pressure was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

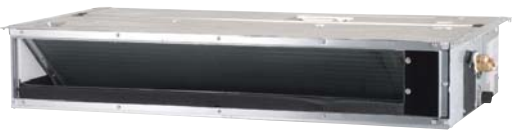

















Slim Duct

Model Name				NH022LHXEA	NH028LHXEA	NH036LHXEA	NH045LHXEA	NH056LHXEA
Power Supply			Ø, V, Hz	1, 220~240, 50	1, 220~240, 50	1, 220~240, 50	1, 220~240, 50	1, 220~240, 50
Performance	Nominal Capacity	Cooling ^{*1)}	W	2,200	2,800	3,600	4,500	5,600
		Heating ^{*2)}	W	2,500	3,200	4,000	5,000	6,300
	Nominal Input		W	80	80	80	90	100
	Running Current		A	0.40	0.40	0.40	0.60	0.60
Sound	Sound Pressure ^{*3)}	High/Low	dB(A)	31/26	32/27	32/27	33/30	33/30
Fan	Type		-	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
Airflow Rate	Cooling	High	CMM	8.0	9.0	10.0	14.0	15.0
	Heating	High	CMM	9.0	10.0	12.0	16.5	18.0
	ESP	Std. (Min.~Max.)	mmAq	2 (0~4)	2 (0~4)	2 (0~4)	2 (0~4)	2 (0~4)
Refrigerant Side	Type		-	R410A	R410A	R410A	R410A	R410A
	Control Method		-	EEV	EEV	EEV	EEV	EEV
	Piping Connections	Liquid (Flare)	Ø, mm (inch)	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	9.52 (3/8")
		Gas (Flare)	Ø, mm (inch)	12.70 (1/2")	12.70 (1/2")	12.70 (1/2")	12.70 (1/2")	15.88 (5/8")
		Drain	Ø, mm	VP25(OD32,ID25)	VP25(OD32,ID25)	VP25(OD32,ID25)	VP25(OD32,ID25)	VP25(OD32,ID25)
External Dimension	Weight	Net	kg	26.0	26.0	26.0	31.0	31.0
		Gross	kg	31.0	31.0	31.0	39.0	39.0
	Dimensions (WxHxD)	Net	mm	900x199x600	900x199x600	900x199x600	1,100x199x600	1,100x199x600
		Gross	mm	1,133x333x730	1,133x333x730	1,133x333x730	1,330x330x730	1,330x330x730

*1) Nominal cooling capacities are based on ; Indoor Air 27°CDB/19°CWB, Outdoor Air 35°CDB/24°CWB, Equivalent refrigerant piping 7.5m, Level differences 0m.
*2) Nominal heating capacities are based on ; Indoor Air 20°CDB/15°CWB, Outdoor Air 7°CDB/6°CWB, Equivalent refrigerant piping 7.5m, Level differences 0m.
*3) Sound Pressure was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

EHS Option & Accessories

Chassis		MONO	SPLIT	TDM			
							
Capacity		9/12/14/16kW	6/10/12.5/14/16kW	2.2~5.6kW	2.2~7.1kW	2.2~7.1kW	6/7/8/11/14/16kW
EEV Kit (Option)	 for 2/3 room	-	-	-	MXD-A13K116A ≤3.6kW 1room + ≥5.6kW 1room		-
					MXD-A13K200A ≤3.6kW x 2room		
					MXD-A16K200A ≥5.6kW x 2room		
					MXD-A13K216A ≤3.6kW 2room + ≥5.6kW 1room		
					MXD-A13K300A ≤3.6kW x 3room		
					MXD-A16K213A ≤3.6kW 1room + ≥5.6kW 2room		
					MXD-A16K300A ≥5.6kW 3room		
Y-joint (Option)		-	-	MXJ-YA1509K (≤15.0kW and below)			
Drain Pump (Option)		-	-	MDP-E075SEE3	-	-	-
Wireless Remote Controller (Option/Included)		-	-	MR-DH00 (Option)	ARH-1364 (Included)	ARH-465 (Included)	-
Remote Controller Receiver Kit (Option)		-	-	MRK-A00	-	-	-
Wired Remote Controller (Option/Included)		-	-	MWR-WH00 MWR-WE10 MWR-SH00 (Option)	-	-	-
Domestic Hot Water Tank (Option)		NH300WHXES NH300WHXEA NH200WHXES NH200WHXEA		-	-	-	NH300WHXES NH300WHXEA NH200WHXES NH200WHXEA
Cylinder Unit (Option)		NH300CHXEA NH200CHXEA (Control Kit is installed)	-	-	-	-	-
Control kit		MIM-E03A	-	-	-	-	-
Base Heater (option/included)		(Included)	(Option) 5.2kW Not applicable	-	-	-	-

Note) Do not recommend that EEV kit is installed near the living room or bed rooms.


EHS Simulator

Through EHS simulation program, you can select devices and simulate heating load, energy consumption, cost, CO2 emission and LCC (Life cycle cost) analysis according to national/regional temperature and architectural conditions. Furthermore, simulation report can be submitted to the client in saved file or printed format.




General conditions

- Location / Design Conditions / Application Setting

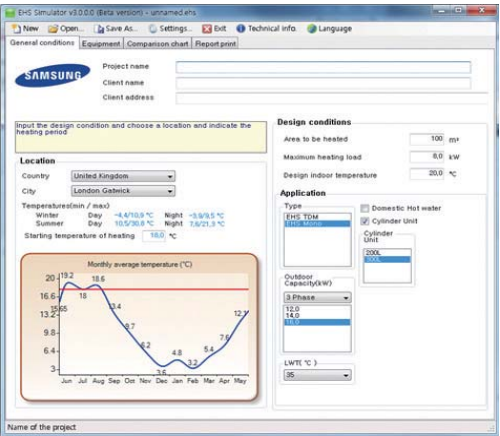


Equipment

- Installation Diagram / Available Equipment List Check

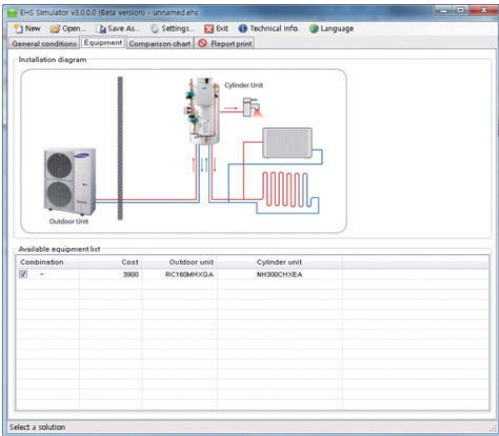

Comparisons chart

- Monthly Heating Load / Annual Energy Consumption & Cost / CO2 Emission / GHG Benefit / LCC Analysis

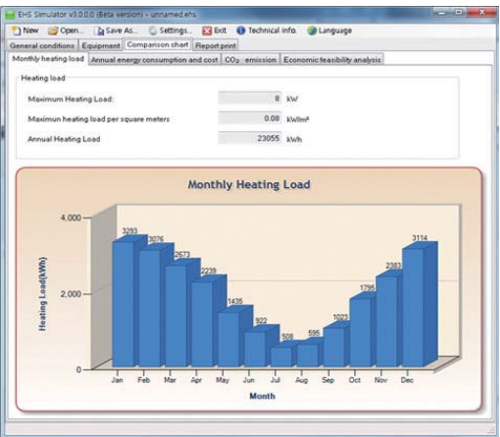

‘Samsung's commercial EHS, coming to us in year 2013!’

Efficient use of energy in commercial area is being requested and it will be likely to become mandatory in near future. Samsung is in on-going process to develop the same concept of efficient and ecological climate solution, which is already applied to residential area, for commercial area and it will be launched in 2013 to provide the same satisfaction to the building owner that once home owners felt

DVM Hydro Unit

Larger capacity and bigger satisfaction for mid-sized commercial areas.

DVM hydro Unit is perfect for mid-sized buildings. They have large capacity lineups which supports up to 50°C water heating while providing comfort warmth.

50°C

Samsung EHS Commercial Type

80°C

DVM Hydro Unit HT

Larger capacity and bigger satisfaction for larger commercial areas.

DVM Hydro Unit HT (High Temperature) has the largest capacity outdoor units to heat up the relatively large-sized buildings. You will be satisfied with the water heating up to 80°C






EHS Commercial Solution

Overview of DVM Hydro Units


- Integrated solution in one system (air and water)
- Provide 50°C or 80°C water
- High COP operation
- Heat recovery technology
- Easy to install
- Integrated control system

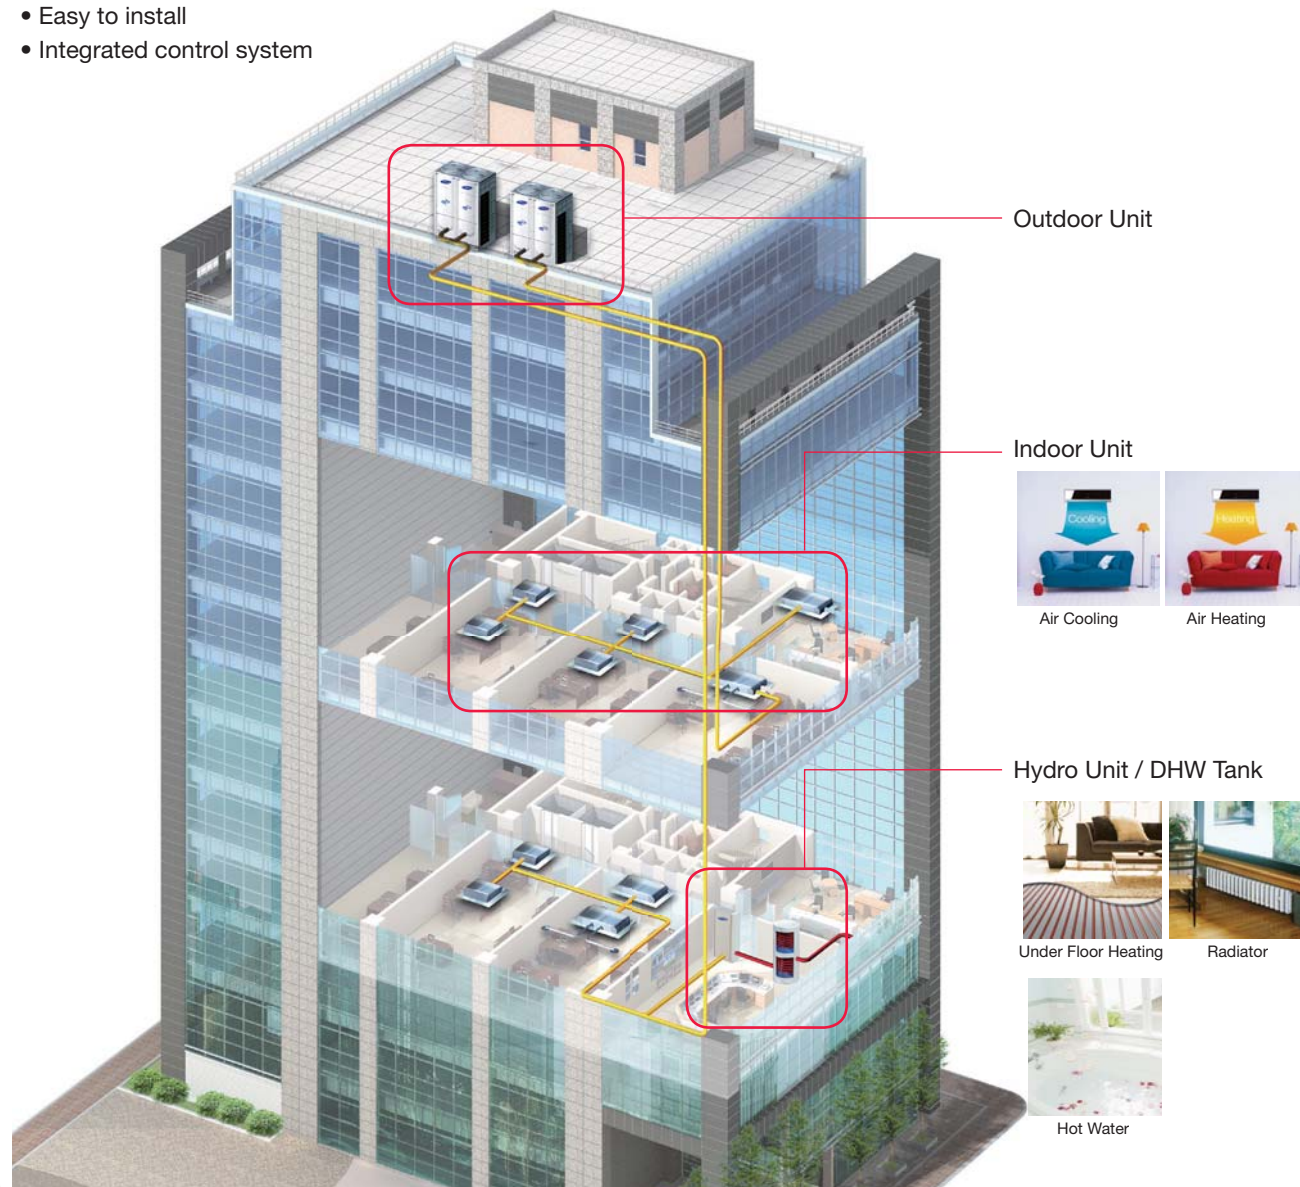

DVM Hydro Unit

Hot water up to 50°C


- Heat pump and Heat recovery(simultaneous cooling and heating) system
- Both air-to-air and air-to-water heating and cooling
- Consist of DVM outdoor units and hydro unit
- Cassette type indoor units are compatible for air-to-air solution
- Compatible with under floor heating and fan coil units
- Water temperature up to 50°C
- Integrated control system
- DVM Plus IV / DVM Mini version : Ongoing
- DVM S version : Jul. 2013

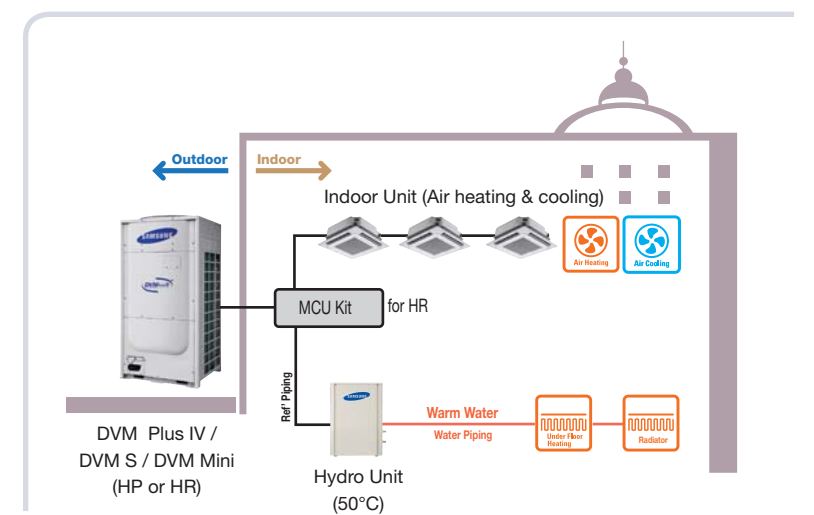

DVM Hydro Unit HT (High Temperature)

Hot water up to 80°C

- Heat pump and Heat recovery(simultaneous cooling and heating) system
- Both air-to-air and air-to-water heating and cooling
- Consist of DVM outdoor units, hydro unit and DHW tank
- Cassette type indoor units are compatible for air-to-air solution
- Compatible with under floor heating and fan coil units
- Water temperature up to 80°C
- Integrated control system
- Ready-to-sale : Jul. 2013

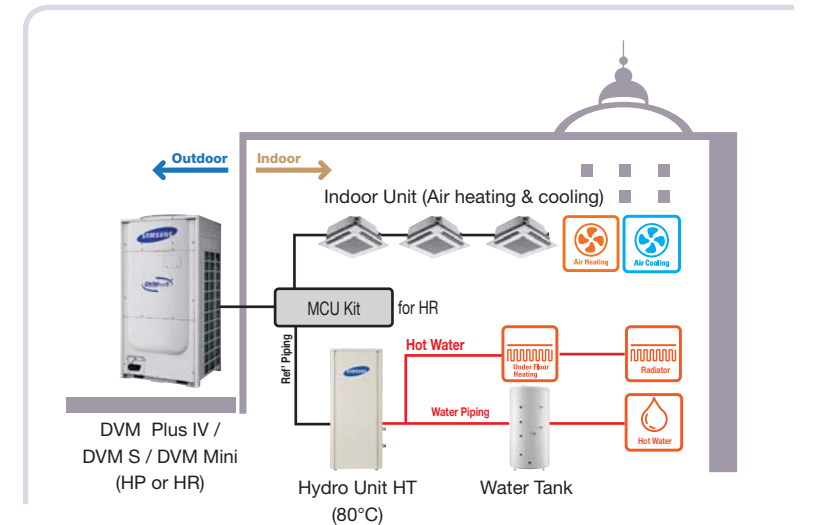

Specification

DVM Plus IV / DVM Mini

Hydro Unit



Model Name				ADN160BDEHA/EU	ADN320BDEHA/EU	ADN500BDEHA/EU
Power Supply			Ø, #, V, Hz	1, 2, 220~240, 50	1, 2, 220~240, 50	1, 2, 220~240, 50
Performance	Nominal Capacity	Heating	W	16,000	31,500	50,400
		Cooling	W	14,000	28,000	44,800
Water Side	Heat Exchanger	Type	-	Brazed Plate	Brazed Plate	Brazed Plate
		Quantity	-	1	1	1
	Required Water Pressure		bar	-	-	-
	Required Flow Rate (Min~Max)		LPM	48 (24~48)	92 (46~92)	150 (75~150)
	Flow Switch		LPM	20	30	50
	Piping Connections	In/Out	Ø, inch	PT 1 (25A)	PT 1 (25A)	PT 1 1/4 (32A)
Refrigerant Side	Heat Exchanger	Type	-	Brazed Plate	Brazed Plate	Brazed Plate
		Quantity	-	1	1	1
	Piping Connections	Liquid	Ø, inch	9.52	9.52	12.7
			Ø, mm	3/8	3/8	1/2
		Gas	Ø, inch	15.88	22.23	28.58
			Ø, inch	5/8	7/8	1 1/8
Sound	Sound Pressure	Heating	dB(A)	26	27	30
		Cooling	dB(A)	27	28	31
	Sound Power		dB(A)	-	-	-
External Dimension	Weight	Net	kg	29	33	40
		Gross	kg	31	35	42
	Dimensions (W x H x D)	Net	mm	518 x 627 x 333	518 x 627 x 333	518 x 627 x 333
		Gross	mm	652 x 700 x 426	652 x 700 x 426	652 x 700 x 426
Operating Range	Ambient	Heating	°C	-20~24	-20~24	-20~24
		Cooling	°C	-5~48	-5~48	-5~48
		DHW	°C	-20~24	-20~24	-20~24
	Leaving Water	Heating	°C	20~50	20~50	20~50
		Cooling	°C	5~30	5~30	5~30


Options& Accessories

Wired Remote Controller(Optional)		MWR-WW00
-----------------------------------	---	----------

Features

Simple Control Scheme

DVM Hydro unit can be implemented with other optional products - Domestic hotwater tank, solar panel. All the related Input & Output terminals are equipped with hydro unit.

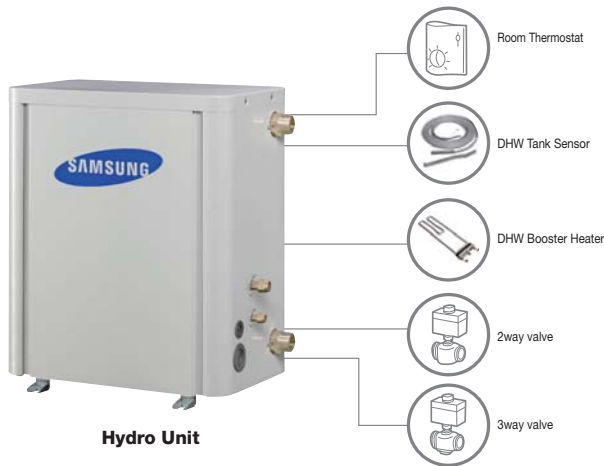

FAQ

Q : What is COP?

A : COP stands for Coefficient of Performance. This is used to measure the energy efficiency of a heat pump system. For example a COP of 4 indicates that for every kW energy input to the system it will deliver 4kW energy output in the form of heat, which means an efficiency of 400%.

Q : How easy is it to install additional air conditioning after installing an EHS system?

A : It is relatively easy to add additional air conditioning to an installed EHS system. The installer will have to disconnect the existing refrigerant piping in order to be able to add the additional piping required for the new air conditioning.

Q : How often do I need to have maintenance servicing for my EHS system?

A : A yearly inspection of the installation is required for optimal operation and efficiency. Main inspection points will involve water pressure, control box and checking the valves. An inspection will take approximately an hour to two hours.

Q : Can I install EHS with a back-up boiler?

A : Yes, that's possible. The back-up boiler needs to be connected to the EHS hydro unit through electrical wiring. From that moment onwards the back-up boiler will be automatically controlled according to ambient temperature.

Q : Is it easy to add solar heating later?

A : It's possible to add solar heating later, however you must choose a solar-ready model of our DHW tank.

Q : Can a heat pump produce instant sanitary hot water?

A : No. EHS employs a storage type hot water tank, so it takes some time to heat up the contained water. But the temperature of the contained water is maintained automatically around the assigned temperature, so you can enjoy a hot shower anytime you want.

Q : Can I take a hot shower and simultaneously use the air conditioning to cool?

A : Certainly. The hot water used for your shower is the water stored in the DHW tank. The temperature of the contained water is maintained automatically around the assigned temperature in winter or summer. So you can enjoy a hot shower while operating the EHS for air conditioning to cool a room.

Q : Is it possible to heat the room through Air Conditioner while heating hot water simultaneously?

A : Technically, EHS will heat the room and hot water separately with TDM technology that switches operation. However, you will feel as if it heats both simultaneously.

Q : What kind of installation disruption will I face when installing EHS?

A : EHS installation is not much different from other products, so you won't find any special disruption. And in case which uses the floor heating of different heating source, you can use an existing floor water piping and the heating source renewal is possible.

Q : What's the different between DHW Tank and Cylinder Unit?

A : Cylinder unit is pre-plumbed water tank unit. It enables quick and easy installation for Mono unit. It is consist of Water Tank, Mono Control Kit, Circulators, 2way valves, Air-vent and Relief valve.

Q : Can Solar Panel be attached to Cylinder Unit?

A : No, we provide two standard 200L and 300L line-ups for Cylinder unit. To connect Solar panel to the system, you can install Water Tank and Control kit separately instead of Cylinder unit.